


PBE PROFESSIONAL TRIM PAINTS

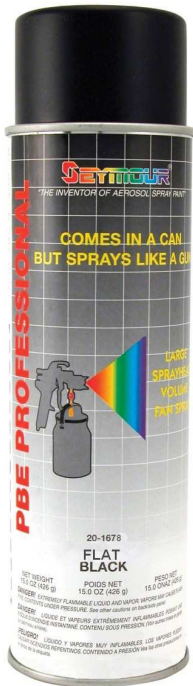

Seymour PBE Professional Trim paint is formulated using an acrylic resin that resists fading from ultraviolet light and degradation from chemicals. Spray like a professional without the equipment, prep time, cleanup, or waste. Several light coats produce a better finish than one heavy coat. A heavy coat applied over an enamel may cause lifting. Bare surfaces or rusted metal surfaces should first be primed with the PBE sandable primers.

Suggested Uses:

body panels
engine parts
metal structures
aviation parts
heavy machinery

Packaging:

Cans per case	6
Shipping weight per case	9 lbs.
Container	20 fluid ounce can
Label weight	15 ounces (425 grams)
Shipping Classification	Consumer Commodity ORM-D, UN 1950
Hazard Class	2.1

Properties:

Flammability	"Extremely Flammable"
Flash point	-4F
Specific Gravity	0.78
Solids Content	~11%
HAPs content	~15%
Storage Temperature	40-100F
Application Temperature	50-90F
Durability	Fair
Abrasion Resistance	Fair
MIR value	Gloss: ~1.05, can't exceed 1.40 Flat: ~0.97, can't exceed 1.20 Clear: ~1.13, can't exceed 1.50
Heat Resistance	250F continuous
Resin System	Acrylic lacquer
Shelf life	Guaranteed for 2 years

Dry Time*:

To touch	5 minutes
To Topcoat	15 minutes

*At 72° F, 50% humidity,
1.5 mil thickness

**Curing/Recoat time is extended with
multiple coats and excessively thick
coats**

Gloss*:	High Gloss, >80
	Flat, <15
	Semi-Gloss, 25-35

*as measured on a 60° gloss meter

Available Colors:

<u>Part #</u>	<u>Description</u>	<u>UPC Code</u>
20-1677	Trim Gloss Black	043281002257
20-1678	Trim Flat Black	043281002264
20-1679	Trim Semi-Gloss Black	043281002141