


TOOL CRIB DRY GRAPHITE LUBE #620-1506

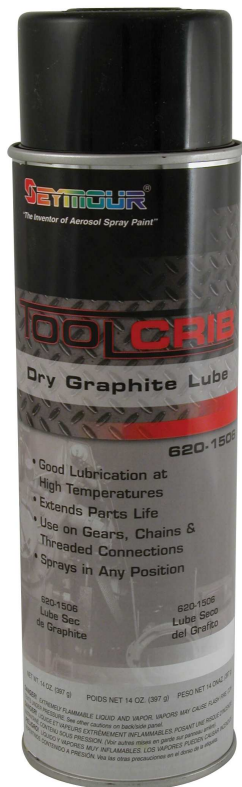

A fast drying graphite lubricant that reduces friction and noise. Effective under heavy pressures and high temperature extremes. The oil-free formulation resists water and alkalies. May be used as a parting compound on dies, sand cores or match plates.

Suggested Uses:

Bearings
Tracts
Conveyors
Flat springs
Hinges

Packaging:

UPC Code	043281007030
Cans per case	6
Shipping weight per case	9 lbs.
Container	20 fluid ounce can
Label weight	14 ounces (397 grams)
Shipping Classification	Consumer Commodity ORM-D UN 1950
Hazard Class	2.1

Properties:

Flammability	"Extremely Flammable"
Flash point	-40 F
Specific Gravity	0.80
Solids Content	~3%
VOC content	~42%, cannot exceed 50%
MIR value	~0.75
HAPs content	~22%
Storage Temperature	40-100F
Application Temperature	50-90F
Operating Speed	2000+ rpm
Extreme Pressures	Yes (100,000 PSI)
Abrasion Resistance	Excellent
Gas Resistance	No
Heat Resistance	850o F
Active Ingredient	graphite
Shelf life	Guaranteed for 2 years

Dry Time*:

Not Applicable

*At 72o F, 50% humidity,
1.5 mil thickness

**Curing/Recoat time is extended with
multiple coats and excessively thick
coats**

Gloss*: Not Applicable

*as measured on a 60o gloss meter