


INSTALLATION DATA SHEET

BRASS PUSH-TO-CONNECT (PC60)

Applications:

Air, water, oil. Use with polyethylene, polyurethane and nylon tubing.

ASSEMBLY INSTRUCTIONS

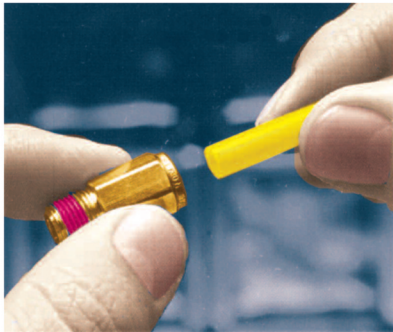

TO CONNECT TUBE:

Cut plastic as squarely as possible. Insert tube end into fitting until friction is felt as tube slides past the O-ring. Using a slight twisting motion while inserting the tube is often helpful. After this initial friction is felt, continue to push in the tube until it bottoms firmly against the internal tube stop.



TO DISCONNECT TUBE:

With thumb and forefinger, hold down the top of the insert against the fitting body and then, with the other hand, pull out the tube. No tools are needed.