


# TECHNICAL DATA SHEET

## STRAIGHT THROUGH PRESSURE WASH Q.D. (QD-BST)

**Applications:** Hot Water

- Temperature: Hot Water +200°F, +93°C With EPR O-Ring
- Smooth bore permits free flow.
- Ideal for high pressure water applications (Pressure Washers)

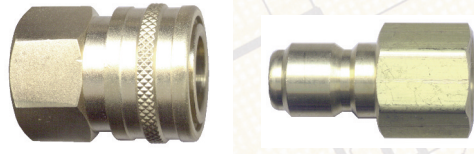

COUPLER SET PRESSURE RATINGS (P.S.I.)			
	1/4	3/8	1/2
BRASS	4000	4000	2200
STEEL	4000	4000	2700
STAINLESS STEEL	4000	4000	3000