




# CHROME SOCKETS



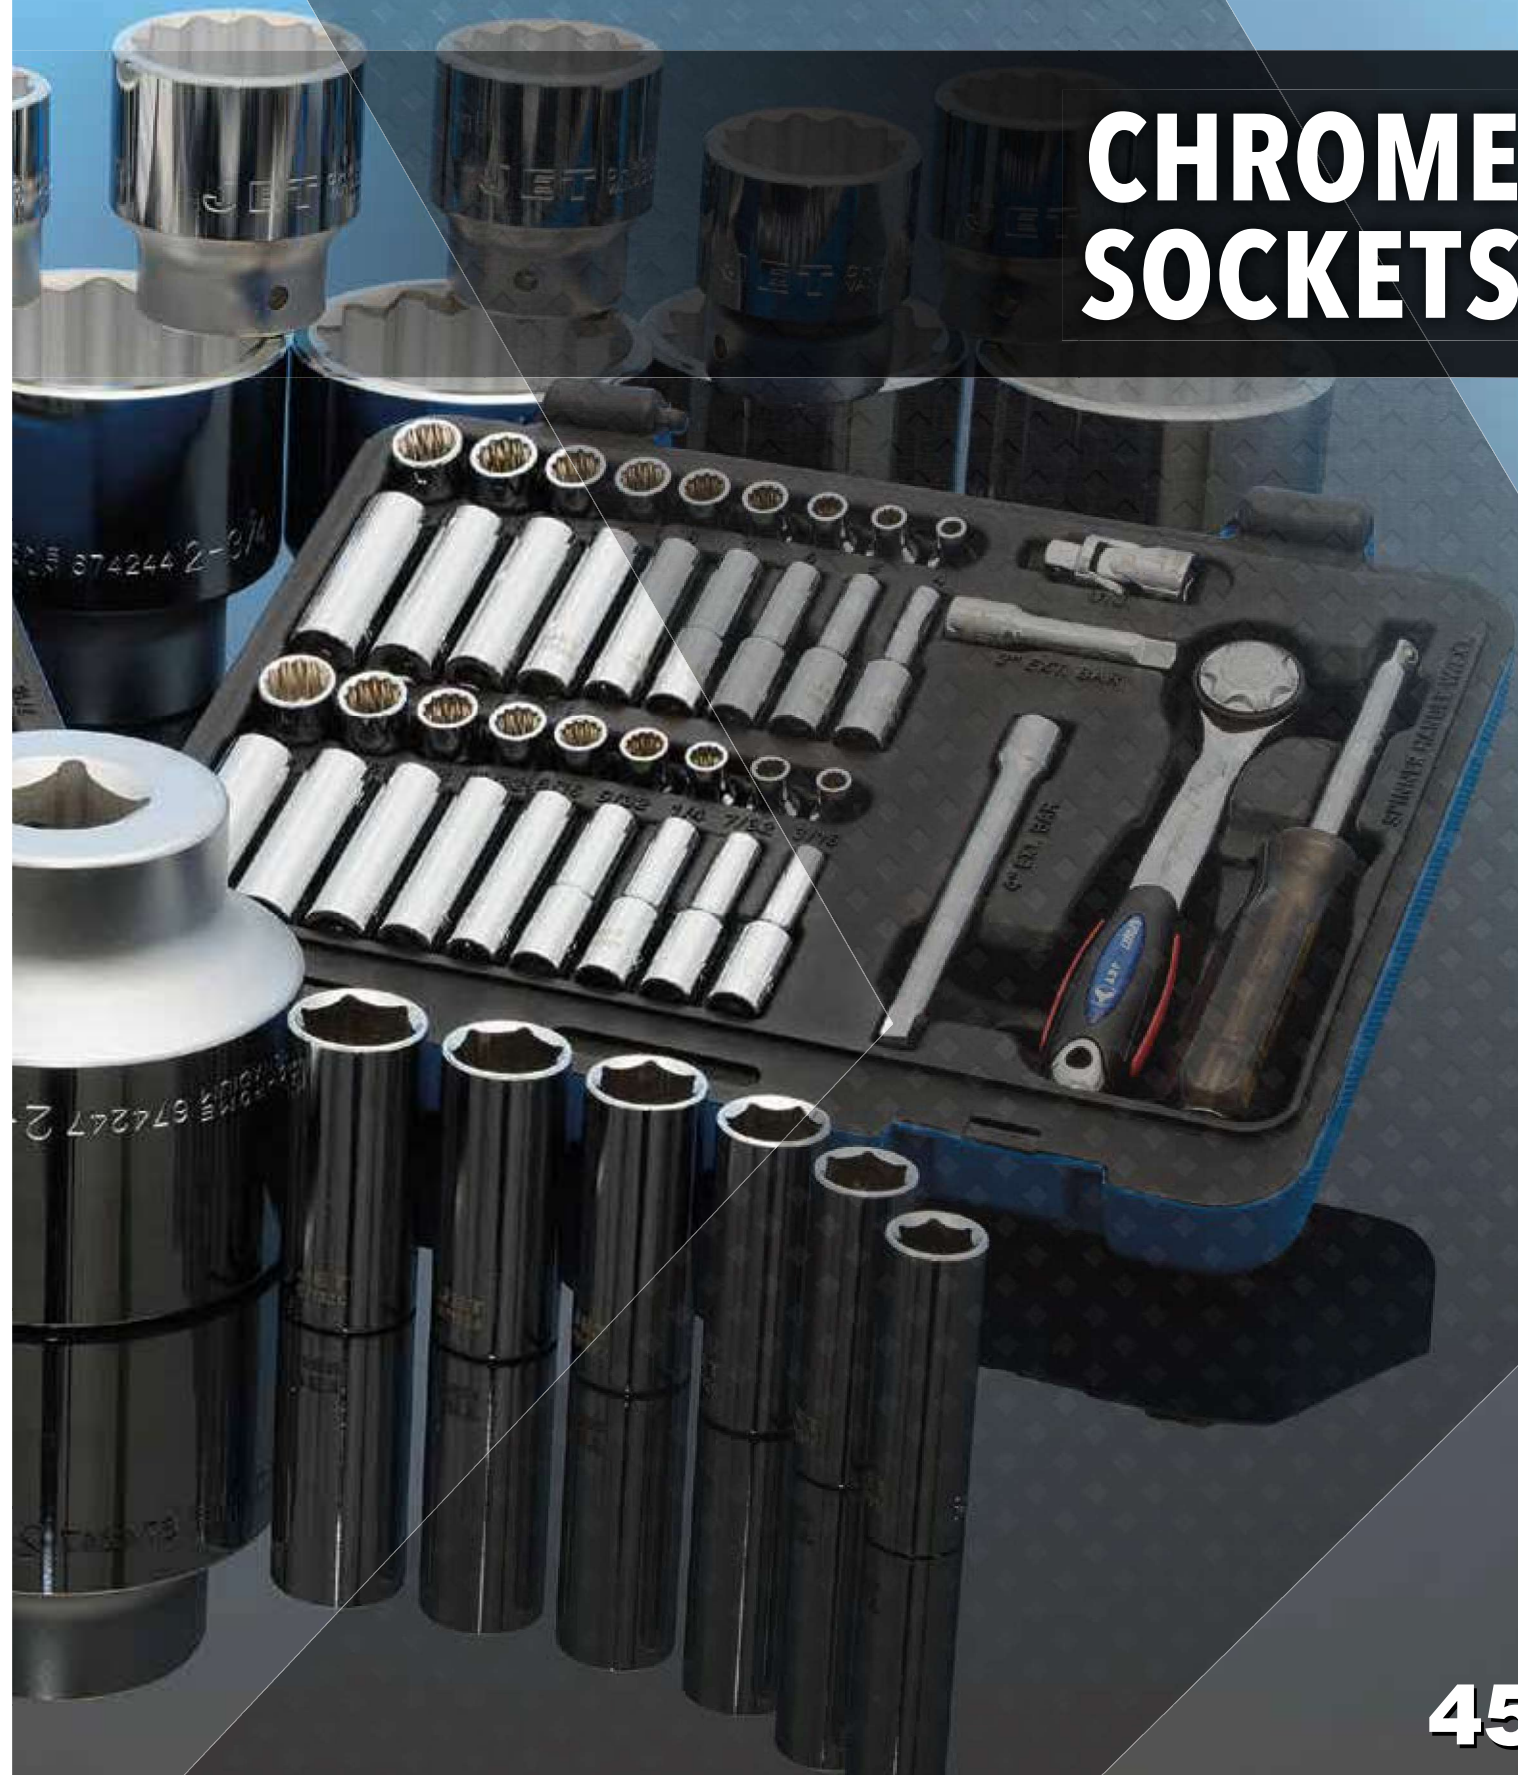

**TORQUE DRIVE**



## 1/4" DR SOCKET WRENCH SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 24 PC SAE - 6 Point

600115 / SW1424-6

#### STANDARD LENGTH SAE

**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

#### DEEP LENGTH SAE

**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

#### STANDARD ACCESSORIES:

- 48 tooth 5-1/2" quick release oval head ratchet (670926)
- 2" (670904) and 6" (670906) extensions
- 6" spinner handle (670912)
- 1-3/8" universal joint (670908)
- Blow mould case with removable lid

**6 CrV**



### 28 PC Metric - 6 Point

600116 / SW1428M-6

#### STANDARD LENGTH METRIC

**4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm**

#### DEEP LENGTH METRIC

**4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm**

#### STANDARD ACCESSORIES:

- 48 tooth 5-1/2" quick release oval head ratchet (670926)
- 2" (670904) and 6" (670906) extensions
- 6" spinner handle (670912)
- 1-3/8" universal joint (670908)
- Blow mould case with removable lid

**6 CrV**



**WARNING:** Do not use chrome sockets on impact wrenches

# 1/4" DR SOCKET WRENCH SETS



## 42 PC SAE/Metric - 6 Point

600125 / SW1442C-6

STANDARD LENGTH SAE

**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

DEEP LENGTH SAE

**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

STANDARD LENGTH METRIC

**4, 5, 6, 7, 8, 9, 10, 11, 12 mm**

DEEP LENGTH METRIC

**4, 5, 6, 7, 8, 9, 10, 11, 12 mm**

STANDARD ACCESSORIES:

- 72 tooth high torque ratchet (670927)
- 2" (670904) and 4" (670915) extensions
- 6" spinner handle (670912)
- 1-3/8" universal joint (670908)
- Blow mould case with removable lid

**6 CrV**



**TORQUE DRIVE**



## 42 PC SAE/Metric - 12 Point

600126 / SW1442C-12

STANDARD LENGTH SAE

**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

DEEP LENGTH SAE

**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

STANDARD LENGTH METRIC

**4, 5, 6, 7, 8, 9, 10, 11, 12 mm**

DEEP LENGTH METRIC

**4, 5, 6, 7, 8, 9, 10, 11, 12 mm**

STANDARD ACCESSORIES:

- 72 tooth high torque ratchet (670927)
- 2" (670904) and 4" (670915) extensions
- 6" spinner handle (670912)
- 1-3/8" universal joint (670908)
- Blow mould case with removable lid

**12 CrV**



**WARNING:** Do not use chrome sockets on impact wrenches



**TORQUE DRIVE**



## 3/8" DR SOCKET WRENCH SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 11 PC SAE - 6 Point

600223 / SW3811-6

STANDARD LENGTH SAE

**5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"**

STANDARD ACCESSORIES:

- 48 tooth 8" quick release oval head ratchet (671926)
- 6" extension (671907)
- Blow mould case

**6** CrV



### 15 PC Metric - 6 Point

600226 / SW3815M-6

STANDARD LENGTH METRIC

**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

STANDARD ACCESSORIES:

- 48 tooth 8" quick release oval head ratchet (671926)
- 6" extension (671907)
- Blow mould case

**6** CrV



### 21 PC SAE - 6 Point

600229 / SW3821-6

STANDARD LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"**

DEEP LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16"**

STANDARD ACCESSORIES:

- 48 tooth 8" quick release oval head ratchet (671926)
- 3" (671905) and 6" (671907) extensions
- 8" flex handle (671902)
- 1-7/8" universal joint (671910)
- Blow mould case with removable lid

**6** CrV



**⚠ WARNING:** Do not use chrome sockets on impact wrenches

# 3/8" DR SOCKET WRENCH SETS



## 30 PC Metric - 6 Point

600234 / SW3830M-6

STANDARD LENGTH METRIC

**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

DEEP LENGTH METRIC

**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

STANDARD ACCESSORIES:

- 48 tooth 8" quick release oval head ratchet (671926)
- 3" (671905) and 6" (671907) extensions
- 8" flex handle (671902)
- 1-7/8" universal joint (671910)
- Blow mould case with removable lid

**6 CrV**



**TORQUE DRIVE**



## 45 PC SAE/Metric - 6 Point

600241 / SW3845C-6

STANDARD LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"**

DEEP LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16"**

STANDARD LENGTH METRIC

**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

DEEP LENGTH METRIC

**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

STANDARD ACCESSORIES:

- 72 tooth high torque ratchet (671928)
- 3" (671905) and 6" (671907) extensions
- 8" flex handle (671902)
- 1-7/8" universal joint (671910)
- Blow mould case with removable lid

**6 CrV**



## 45 PC SAE/Metric - 12 Point

600242 / SW3845C-12

STANDARD LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"**

DEEP LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16"**

STANDARD LENGTH METRIC

**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

DEEP LENGTH METRIC

**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

STANDARD ACCESSORIES:

- 72 tooth high torque ratchet (671928)
- 3" (671905) and 6" (671907) extensions
- 8" flex handle (671902)
- 1-7/8" universal joint (671910)
- Blow mould case with removable lid

**12 CrV**



**WARNING:** Do not use chrome sockets on impact wrenches



# HEAT TREATED FOR PROFESSIONAL USE

## TORQUE DRIVE®



### 1/2" DR SOCKET WRENCH SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

#### 19 PC Metric - 6 Point

600326 / SW1219M-6

##### STANDARD LENGTH METRIC

**12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24 mm**

##### STANDARD ACCESSORIES:

- 48 tooth 10" quick release oval head ratchet (672926)
- 5" (672905) and 10" (672906) extensions
- 15" flex handle (672903)
- 2-3/4" universal joint (672908)
- Blow mould case with removable lid

**6 CrV**



#### 20 PC SAE - 6 Point

600323 / SW1220-6

##### STANDARD LENGTH SAE

**7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4"**

##### STANDARD ACCESSORIES:

- 48 tooth 10" quick release oval head ratchet (672926)
- 5" (672905) and 10" (672906) extensions
- 15" flex handle (672903)
- 2-3/4" universal joint (672908)
- Blow mould case

**6 CrV**



**⚠ WARNING:** Do not use chrome sockets on impact wrenches

# HIGH QUALITY CHROME VANADIUM STEEL

## 1/2" DR SOCKET WRENCH SETS

### 29 PC SAE - 6 Point

600331 / SW1229-6

#### STANDARD LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4"**

#### DEEP LENGTH SAE

**7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8"**

#### STANDARD ACCESSORIES:

- 48 tooth 10" quick release oval head ratchet (672926)
- 2" (672904), 5" (672905) and 10" (672906) extensions
- 10" sliding T-handle (672907)
- 2-3/4" universal joint (672908)
- Blow mould case with removable lid

**6 CrV**



## TORQUE DRIVE



### 55 PC SAE/Metric - 6 Point

600341 / SW1255C-6

#### STANDARD LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4"**

#### DEEP LENGTH SAE

**7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8"**

#### STANDARD LENGTH METRIC

**10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32mm**

#### DEEP LENGTH METRIC

**10, 12, 13, 14, 15, 16, 17, 18, 19, 21 mm**

#### STANDARD ACCESSORIES:

- 72 tooth high torque ratchet (672928)
- 2" (672904), 5" (672905) and 10" (672906) extensions
- 10" sliding T-handle (672907)
- 2-3/4" universal joint (672908)
- Blow mould case with removable lid

**6 CrV**



**WARNING:** Do not use chrome sockets on impact wrenches



**TORQUE DRIVE**



## 3/4" DR SOCKET WRENCH SETS

- All components forged from high quality Chrome Vanadium steel
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 7 PC Telescope Tool Set

690105 / SDK3407

#### STANDARD ACCESSORIES:

- 40 tooth super duty reversible ratchet (673923)
- 20-32" telescoping drive handle (for use with all items in kit) (673914)
- 4" extension (673903)
- 3/4" Female x 1" Male adapter (673912)
- Sliding T-handle head (673910)
- Flex joint head (673911)
- Blow mould case

CrV



### 21 PC SAE - 12 Point

600402 / SW7521

#### STANDARD LENGTH SAE

**3/4, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8, 1-3/4, 1-7/8, 2"**

#### STANDARD ACCESSORIES:

- 42 tooth 20" round head ratchet (673901)
- 4" (673903) and 8" (673904) extensions
- 18" sliding T-handle (673906)
- Metal case

12

CrV



### 21 PC SAE - 12 Point

600406 / SW7521-HD

#### STANDARD LENGTH SAE

**3/4, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8, 1-3/4, 1-7/8, 2"**

#### STANDARD ACCESSORIES:

- 24 tooth 19-1/2" deluxe oval head ratchet (673922)
- 4" (673903) and 8" (673904) extensions
- 18" sliding T-handle (673906)
- Blow mould case

12

CrV



Heavy Duty Ratchet

**WARNING:** Do not use chrome sockets on impact wrenches



## 1" DR SOCKET WRENCH SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 17 PC SAE - 12 Point

600505 / SW1017

#### STANDARD LENGTH SAE

**1-7/16, 1-1/2, 1-5/8, 1-11/16, 1-3/4, 1-7/8, 2, 2-3/16,  
2-1/4, 2-3/8, 2-1/2"**

#### STANDARD ACCESSORIES:

- 24 tooth heavy duty reversible ratchet head (674901)
- 8" (674905) and 16" (674903) extensions
- 22" universal handle (included with 674901)
- Sliding T-head
- Metal case

**12 CrV**



### 21 PC SAE- 12 Point

600503 / SW1021

#### STANDARD LENGTH SAE

**1-7/16, 1-1/2, 1-5/8, 1-11/16, 1-3/4, 1-13/16,  
1-7/8, 2, 2-1/8, 2-3/16, 2-1/4, 2-3/8, 2-1/2, 2-5/8,  
2-3/4, 2-15/16, 3-1/8"**

#### STANDARD ACCESSORIES:

- 24 tooth heavy duty reversible ratchet head (674901)
- 8" (674905) and 16" (674903) extensions
- 22" universal handle (included with 674901)
- Sliding T-head
- Metal case

**12 CrV**



**WARNING:** Do not use chrome sockets on impact wrenches


**TORQUE DRIVE®**


## 1/4" DR SOCKET SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 9 PC SAE - 6 Point

**601102 / SS1409-6**
*STANDARD LENGTH SAE*
**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

- Includes socket rail

**6 CrV**

### 9 PC Deep SAE - 6 Point

**601107 / SS1409D-6**
*DEEP LENGTH SAE*
**3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2"**

- Includes socket rail

**6 CrV**

### 11 PC Metric - 6 Point

**601113 / SS1411M-6**
*STANDARD LENGTH METRIC*
**4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm**

- Includes socket rail

**6 CrV**

### 11 PC Deep Metric - 6 Point

**601118 / SS1411DM-6**
*DEEP LENGTH METRIC*
**4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm**

- Includes socket rail

**6 CrV**

**⚠ WARNING:** Do not use chrome sockets on impact wrenches

## 3/8" DR SOCKET SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 8 PC SAE - 6 Point

601219 / SS3808-6

STANDARD LENGTH SAE

**5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"**

- Includes socket rail

**6** CrV

### 8 PC Deep SAE - 6 Point

601220 / SS3808D-6

DEEP LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16"**

- Includes socket rail

**6** CrV

### 9 PC SAE - 12 Point

601227 / SS3809-12

STANDARD LENGTH SAE

**1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"**

- Includes socket rail

**12** CrV

### 9 PC Deep SAE - 12 Point

601229 / SS3809D-12

DEEP LENGTH SAE

**1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"**

- Includes socket rail

**12** CrV

**⚠ WARNING:** Do not use chrome sockets on impact wrenches



**TORQUE DRIVE**




**TORQUE DRIVE**


## 3/8" DR SOCKET SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 12 PC Metric - 6 Point

**601224** / SS3812M-6

*STANDARD LENGTH METRIC*
**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

- Includes socket rail

**6** CrV

### 12 PC Metric - 12 Point

**601234** / SS3812M-12

*STANDARD LENGTH METRIC*
**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

- Includes socket rail

**12** CrV

### 12 PC Deep Metric - 6 Point

**601226** / SS3812DM-6

*DEEP LENGTH METRIC*
**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

- Includes socket rail

**6** CrV

### 12 PC Deep Metric - 12 Point

**601236** / SS3812DM-12

*DEEP LENGTH METRIC*
**8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm**

- Includes socket rail

**12** CrV

**⚠ WARNING:** Do not use chrome sockets on impact wrenches

## 1/2" DR SOCKET SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 15 PC SAE - 6 Point

601316 / SS1215-6

STANDARD LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16,  
1-1/8, 1-3/16, 1-1/4"**

- Includes socket rail

**6** CrV

### 15 PC SAE - 12 Point

601317 / SS1215-12

STANDARD LENGTH SAE

**3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16,  
1-1/8, 1-3/16, 1-1/4"**

- Includes socket rail

**12** CrV

### 13 PC Deep SAE - 6 Point

601313 / SS1213D-6

DEEP LENGTH SAE

**7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4"**

- Includes socket rail

**6** CrV

### 13 PC Deep SAE - 12 Point

601318 / SS1213D-12

DEEP LENGTH SAE

**7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4"**

- Includes socket rail

**12** CrV

**⚠ WARNING:** Do not use chrome sockets on impact wrenches



**TORQUE DRIVE**





**TORQUE DRIVE**



**13 PC Metric - 6 Point**

601312 / SS1213M-6

STANDARD LENGTH METRIC

**10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm**

- Includes socket rail

**6** CrV



**14 PC Metric - 12 Point**

601319 / SS1214M-12

STANDARD LENGTH METRIC

**10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm**

- Includes socket rail

**12** CrV



**13 PC Deep Metric - 6 Point**

601314 / SS1213DM-6

DEEP LENGTH METRIC

**10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm**

- Includes socket rail

**6** CrV



**14 PC Deep Metric - 12 Point**

601320 / SS1214DM-12

DEEP LENGTH METRIC

**10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm**

- Includes socket rail

**12** CrV

**⚠ WARNING:** Do not use chrome sockets on impact wrenches

## 3/4" DR SOCKET SETS

- All components forged from high quality Chrome Vanadium steel
- TORQUE DRIVE® sockets contact the fastener on the sides rather than the corners, reducing corner rounding and allowing 20% more torque
- Chamfered edges allow easiest socket placement on fastener, increasing productivity and reducing frustration
- Extra long deep sockets ensure maximum accessibility
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### 17 PC SAE - 12 Point

601405 / SS3417

#### STANDARD LENGTH SAE

**7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16,  
1-1/2, 1-5/8, 1-3/4, 1-13/16, 1-7/8, 2"**

- Metal case

**12** 

## TORQUE DRIVE®



### 17 PC Deep SAE - 6 Point

601407 / SS31417D-6

#### DEEP LENGTH SAE

**7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2,  
1-5/8, 1-3/4, 1-13/16, 1-7/8, 2"**

- Metal case

**6** 



### 17 PC Metric - 12 Point

601406 / SS3417M

#### STANDARD LENGTH METRIC

**19, 21, 22, 23, 24, 26, 27, 29, 30, 32, 35, 36, 38, 41, 46, 50 mm**

- Metal case

**12** 



 **WARNING:** Do not use chrome sockets on impact wrenches



## HEX BIT SOCKET SETS

- All sockets forged from high quality Chrome Vanadium steel
- Hex bits are made of superior quality S2 steel for maximum strength
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI B107-10M, B107-1, B107-5



### 7 PC SAE Hex Bit

601201 / HSW3811

- 3/8" DR  
2" (OVERALL LENGTH) SAE HEX BIT SOCKETS:  
**1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"**
- Includes socket rail



### 7 PC Metric Hex Bit

601202 / HSW3811M

- 3/8" DR  
2" (OVERALL LENGTH) METRIC HEX BIT SOCKETS:  
**3, 4, 5, 6, 7, 8, 10 mm**
- Includes socket rail



### 10 PC SAE Hex Bit

601802 / HSW3812-10

- 3/8" DR  
2" (OVERALL LENGTH) SAE HEX BIT SOCKETS:  
**1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"**
- 1/2" DR  
2-1/4" (OVERALL LENGTH) SAE HEX BIT SOCKETS:  
**1/2, 9/16, 5/8"**
- Includes socket rail



### 10 PC Metric Hex Bit

601803 / HSW3812-10M

- 3/8" DR  
2" (OVERALL LENGTH) METRIC HEX BIT SOCKETS:  
**3, 4, 5, 6, 7, 8, 10mm**
- 1/2" DR  
2-1/4" (OVERALL LENGTH) METRIC HEX BIT SOCKETS:  
**12, 14, 16mm**
- Includes socket rail



**⚠ WARNING:** Do not use chrome sockets on impact wrenches



## HEX BIT SOCKET SETS



### 7 PC SAE Long Ball Nose

601804 / LHSW3807

- 3/8" DR  
4" (OVERALL LENGTH) S.A.E EXTRA LONG BALL NOSE HEX BIT SOCKETS:  
**1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"**
- Includes socket rail



### 7 PC Metric Long Ball Nose

601805 / LHSW3807M

- 3/8" DR  
4" (OVERALL LENGTH) METRIC HEX BIT SOCKETS:  
**4, 5, 6, 7, 8, 9, 10 mm**
- Includes socket rail



### 14 PC SAE / Metric - Long Series

601808 / LHSW1438-14C

- 4" (OVERALL LENGTH) SAE EXTRA LONG HEX BIT SOCKETS:
  - 1/4" DR:  
**1/8, 5/32, 3/16"**
  - 3/8" DR:  
**7/32, 1/4, 5/16, 3/8"**
- 4" (OVERALL LENGTH) METRIC EXTRA LONG HEX BIT SOCKETS:
  - 1/4" DR:  
**4, 5, 6mm**
  - 3/8" DR:  
**7, 8, 9, 10 mm**
- Blow mould case



**WARNING:** Do not use chrome sockets on impact wrenches



## TORX® BITS SOCKET SETS

- All sockets forged from high quality Chrome Vanadium steel
- TORX® bits are made of superior quality S2 steel for maximum strength
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications



### 6 PC 3/8" DR - Tamperproof

601216 / SS386TB

2" (OVERALL LENGTH) TORX® BIT SOCKETS:

**T25, T30, T40, T45, T50, T55**

- Includes socket rail



### 10 PC 1/4" & 3/8" DR - Tamperproof

601801 / SS1438-10TB

- 1/4" DR  
1-1/2" (OVERALL LENGTH) TORX® BIT  
**T10, T15, T20, T25, T27, T30**

- 3/8" DR  
2" (OVERALL LENGTH) TORX® BIT  
**T40, T45, T50, T55**

- Includes socket rail



### 11 PC 1/4" & 3/8" DR

601806 / SS1438-11T

- 1/4" DR  
1-1/2" (OVERALL LENGTH) TORX® BIT:  
**T10, T15, T20, T25, T27, T30**
- 3/8" DR 2" (OVERALL LENGTH) TORX® BIT:  
**T40, T45, T47, T50, T55**
- Includes socket rail



**WARNING:** Do not use chrome sockets on impact wrenches

# EXTERNAL TORX® SOCKET SETS



- All components forged from high quality Chrome Vanadium steel
- Chamfered edges

## 7 PC 1/4" DR 601111 / SS1407TS

STANDARD LENGTH EXTERNAL TORX®

**E4, E5, E6, E7, E8, E10, E11**

- Includes socket rail




## 6 PC 3/8" DR 601231 / SS3806TS

STANDARD LENGTH EXTERNAL TORX®

**E6, E8, E10, E12, E14, E16**

- Includes socket rail

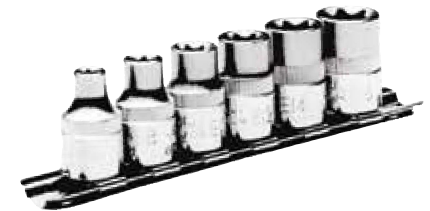

## 12 PC 3/8" DR 601232 / SS3812TS

STANDARD LENGTH EXTERNAL TORX®

**E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18, E20**

- Includes socket rail



## 9 PC 1/2" DR 601321 / SS1209TS

STANDARD LENGTH EXTERNAL TORX®

**E10, E11, E12, E14, E16, E18, E20, E22, E24**

- Includes socket rail



## 28 PC 1/4", 3/8" and 1/2" DR 601811 / SS328TS

STANDARD LENGTH EXTERNAL TORX®

- 1/4" DR: **E4, E5, E6, E7, E8, E10, E11**
- 3/8" DR: **E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18, E20**
- 1/2" DR: **E10, E11, E12, E14, E16, E18, E20, E22, E24**
- Blow mould case



**WARNING:** Do not use chrome sockets on impact wrenches



## SAE OPEN STOCK

- All items meet U.S. Federal Specifications: GGG-W-641e, Canadian Government Specification CDA39-GP-12b and ANSI specifications

Drive Size SAE	1/4" Regular 6 pt.	1/4" Deep 6 pt.	1/4" Regular 12 pt.	1/4" Deep 12 pt.	3/8" Regular 6 pt.	3/8" Deep 6 pt.	3/8" Regular 12 pt.	3/8" Deep 12 pt.
3/16"	670106	670306	670206	670406				
7/32"	670107	670307	670207	670407				
1/4"	670108	670308	670208	670408	671108		671208	671408
9/32"	670109	670309	670209	670409				
5/16"	670110	670310	670210	670410	671110		671210	671410
11/32"	670111	670311	670211	670411				
3/8"	670112	670312	670212	670412	671112	671312	671212	671412
7/16"	670114	670314	670214	670414	671114	671314	671214	671414
1/2"	670116	670316	670216	670416	671116	671316	671216	671416
9/16"					671118	671318	671218	671418
5/8"					671120	671320	671220	671420
11/16"					671122	671322	671222	671422
3/4"					671124	671324	671224	671424
13/16"					671126	671326		
7/8"					671128	671328		
15/16"					671130			
1"					671132			



## 3/8" DR SPARK PLUG SOCKETS

### 5 PC Magnetic Spark Plug Socket Set

H3704/SS1438-11T

- Long reach magnetic swivel spark plug socket set
- For hex sizes 5/8", 13/16" and 9/16" on Ford Triton® engines
- Made from CrV steel, with a bright hard chrome finish

#### Set Includes:

- 3/8" DR x 9/16" HEX x 2-1/2" (66 mm) Long ..... **H3704-10**
- 3/8" DR x 5/8" HEX x 4" (101.6 mm) Long ..... **H3704-14**
- 3/8" DR x 5/8" HEX x 6" (152.4 mm) Long ..... **H3704-16**
- 3/8" DR x 5/8" HEX x 11" (279.4 mm) Long ..... **H3704-18**
- 3/8" DR x 13/16" HEX x 6" (152.4 mm) Long ..... **H3704-22**

CrV

### Spark Plug Sockets

- Features rubber inserts to protect spark plugs from damage

PROD. NO.	Drive	Hex Size
671932	3/8"	5/8"
671934	3/8"	13/16"



See our Specialty Automotive section for more information

**WARNING:** Do not use chrome sockets on impact wrenches

- All items meet U.S. Federal Specifications: GGG-W-641e, Canadian Government Specification CDA39-GP-12b and ANSI specifications

Drive Size SAE	1/2"		1/2"		3/4"		1"
	Regular 6 pt.	Deep 6 pt.	Regular 12 pt.	Deep 12 pt.	Regular 12pt.	Deep 6 pt.	Regular 12 pt.
3/8"	672112		672212				
7/16"	672114	672314	672214	672414			
1/2"	672116	672316	672216	672416			
9/16"	672118	672318	672218	672418			
5/8"	672120	672320	672220	672420			
11/16"	672122	672322	672222	672422			
3/4"	672124	672324	672224	672424	673212		
13/16"	672126	672326	672226	672426			
7/8"	672128	672328	672228	672428	673214	673414	
15/16"	672130	672330	672230	672430	673215	673415	
1"	672132	672332	672232	672432	673216	673416	
1-1/16"	672134	672334	672234	672434	673217	673417	
1-1/8"	672136	672336	672236	672436	673218	673418	
1-3/16"	672138		672238		673219	673419	
1-1/4"	672140	672340	672240	672440	673220	673420	
1-5/16"					673221	673421	
1-3/8"					673222	673422	
1-7/16"					673223	673423	674223
1-1/2"					673224	673424	674224
1-9/16"					673225		
1-5/8"					673226	673426	674226
1-11/16"					673227		674227
1-3/4"					673228	673428	674228
1-13/16"					673229	673429	674229
1-7/8"					673230	673430	674230
2"					673232	673432	674232
2-1/8"							674234
2-3/16"							674235
2-1/4"							674236
2-3/8"							674238
2-1/2"							674240
2-5/8"							674242
2-3/4"							674244
2-15/16"							674247
3"							674248
3-1/8"							674250



672414



672228



673224

**WARNING:** Do not use chrome sockets on impact wrenches

## METRIC OPEN STOCK

- All items meet U.S. Federal Specifications: GGG-W-641e, Canadian Government Specification CDA39-GP-12b and ANSI specifications

Drive Size Metric	1/4"		1/4"		3/8"		3/8"		3/8"	
	Regular 6 pt.	Deep 6 pt.	Regular 12 pt.	Deep 12 pt.	Regular 6 pt.	Deep 6 pt.	Regular 12 pt.	Deep 12 pt.	Regular 12 pt.	Deep 12 pt.
4 mm	670502	670702	670602	670802						
4.5 mm	670503									
5 mm	670504	670704	670604	670804						
5.5 mm	670505	670705								
6 mm	670506	670706	670606	670806	671506					
7 mm	670507	670707	670607	670807	671507					
8 mm	670508	670708	670608	670808	671508	671708	671608	671808		
9 mm	670509	670709	670609	670809	671509	671709	671609	671809		
10 mm	670510	670710	670610	670810	671510	671710	671610	671810		
11 mm	670511	670711	670611	670811	671511	671711	671611	671811		
12 mm	670512	670712	670612	670812	671512	671712	671612	671812		
13 mm	670513	670713			671513	671713	671613	671813		
14 mm					671514	671714	671614	671814		
15 mm					671515	671715	671615	671815		
16 mm					671516	671716	671616	671816		
17 mm					671517	671717	671617	671817		
18 mm					671518	671718	671618	671818		
19 mm					671519	671719	671619	671819		
20 mm					671520					
21 mm					671521	671721				
22 mm					671522					
23 mm										
24 mm					671524					



**WARNING:** Do not use chrome sockets on impact wrenches

# METRIC OPEN STOCK



- All items meet U.S. Federal Specifications: GGG-W-641e, Canadian Government Specification CDA39-GP-12b and ANSI specifications

Drive Size Metric	1/2"		1/2"		3/4"	
	Regular 6 pt.	Deep 6 pt.	Regular 12 pt.	Deep 12 pt.	Regular 12 pt.	
8 mm	672508					
9 mm	672509					
10 mm	672510	672710	672610	672810		
11 mm	672511		672611	672811		
12 mm	672512	672712	672612	672812		
13 mm	672513	672713	672613	672813		
14 mm	672514	672714	672614	672814		
15 mm	672515	672715	672615	672815		
16 mm	672516	672716	672616	672816		
17 mm	672517	672717	672617	672817		
18 mm	672518	672718	672618	672818		
19 mm	672519	672719	672619	672819	673619	
20 mm	672520	672720	672620	672820		
21 mm	672521	672721	672621	672821	673621	
22 mm	672522	672722	672622	672822	673622	
23 mm	672523	672723			673623	
24 mm	672524	672724	672624	672824	673624	
26 mm					673626	
27 mm	672527	672727			673627	
29 mm					673629	
30 mm	672530				673630	
32 mm	672532				673632	
35 mm					673635	
36 mm					673636	
38 mm					673638	
41 mm					673641	
46 mm					673646	
50 mm					673650	



672824



672610

## JET-A-SIZER - Fastener Sizing Tool

779901 / JFST-1

- Handy tool quickly and accurately identifies size of nut or bolt head
- Works on 6 point SAE and Metric fasteners
- Eliminates unnecessary trips to the tool box
- Permanently stamped sizes for a lifetime of use
- Integrated keychain hook keeps tool handy
- Measuring range: 5/16 - 1", 8 - 25mm



**WARNING:** Do not use chrome sockets on impact wrenches



Long  
677130



Regular  
677210

## SAE HEX BITS OPEN STOCK

- All sockets forged from high quality Chrome Vanadium steel
- Hex bits are made of superior quality S2 steel for maximum strength
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

Drive Size SAE	1/4"	3/8"	3/8"	3/8"	1/2"
	4" Long	Regular	4" Long	4" Long Ball Nose	Regular
1/8"	677021	677204		677224	
5/32"	677022	677205		677225	
3/16"	677023	677206		677226	
7/32"		677207	677127	677227	
1/4"		677208	677128	677228	
9/32"					
5/16"		677210	677130	677230	
11/32"					
3/8"		677212	677132	677232	
1/2"					677316
9/16"					677318
5/8"					677320



**WARNING:** Do not use chrome sockets on impact wrenches

Long Ball Nose





# METRIC HEX BITS OPEN STOCK



- All sockets forged from high quality Chrome Vanadium steel
- Hex bits are made of superior quality S2 steel for maximum strength
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

Drive Size Metric	1/4" 4" Long	3/8" Regular	3/8" 4" Long	3/8" 4" Long Ball Nose	1/2" Regular
3 mm		677253			
4 mm	677071	677254		677274	
5 mm	677072	677255		677275	
6 mm	677073	677256		677276	
7 mm		677257	677177	677277	
8 mm		677258	677178	677278	
9 mm			677179	677279	
10 mm		677260	677180	677280	
12 mm					677362
14 mm					677364
16 mm					677366

**NOTE:** 3/8" drive regular length sockets = 2" overall length  
 1/2" drive regular length sockets = 2-1/4" overall length



Long  
677179



Long Ball Nose  
677280



Regular  
677366

**WARNING:** Do not use chrome sockets on impact wrenches



677767  
tamperproof

677787  
Non-tamperproof



677865

## TORX® BITS OPEN STOCK

Drive Size TORX®	1/4"	1/4"	3/8"	3/8"
	Non- Tamperproof	Tamperproof	Non- Tamperproof	Tamperproof
T10	677726	677706		
T15	677727	677707		
T20	677728	677708		
T25	677729	677709		677759
T27	677730	677710		
T30	677731	677711		677761
T40			677783	677763
T45			677784	677764
T47			677785	
T50			677786	677766
T55			677787	677767



## EXTERNAL TORX® BITS OPEN STOCK

Drive Size External TORX®	1/4"	3/8"	1/2"
	Regular	Regular	Regular
E4	677803	677821	
E5	677804	677822	
E6	677805	677823	
E7	677806	677845	
E8	677807	677824	
E10	677809	677825	677851
E11	677810	677847	677852
E12		677826	677853
E14		677827	677855
E16		677828	677857
E18		677830	677859
E20		677832	677861
E22			677863
E24			677865



**WARNING:** Do not use chrome sockets on impact wrenches

# SOCKET ACCESSORIES



- All components are forged from high quality Chrome Vanadium steel
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

## Universal Joints

PROD. NO.	MOD. NO.	Drive
670908	SA1407	1/4" x 1/4"
671910	SA3810	3/8" x 3/8"
672908	SA1207	1/2" x 1/2"



## Socket Adapters

PROD. NO.	MOD. NO.	Male	Female
<b>OPEN STOCK</b>			
670911	SA1410	3/8"	1/4"
671913	SA3813	1/4"	3/8"
671914	SA3814	1/2"	3/8"
672911	SA1210	3/8"	1/2"
672912	SA1211	3/4"	1/2"
673907	SA7506	1/2"	3/4"
673912	SA7511	1/2"	3/4"

### 5 PC CHROME SOCKET ADAPTER SET

690115	SA-5S	3/8"	1/4"
		1/4"	3/8"
		1/2"	3/8"
		3/8"	1/2"
		3/4"	1/2"



## Socket Clip Rails

- Includes one each for 1/4", 3/8", and 1/2" drive sockets

PROD. NO.	MOD. NO.	Drive	Clips
<b>3 PC SOCKET CLIP RAIL SET</b>			
690111	SCH-3S	1/4, 3/8, 1/2"	16 each (48 Total)

### OPEN STOCK

670913	SCH-14	1/4"	16
671917	SCH-38	3/8"	16
672913	SCH-12	1/2"	16



670908



673912



672911

673907



690115



690111

**WARNING:** Do not use chrome sockets on impact wrenches



672918

674909



Extra strong CrMo gear components  
for professional use

## SOCKET ACCESSORIES

- All components are forged from high quality Chrome Vanadium steel
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

### Flex Bars

PROD. NO.	MOD. NO.	Drive	Length	Max. Torque
670902	SA1401	1/4"	6"	35 ft/lb
671902	SA3801	3/8"	8"	100 ft/lb
672902	SA1201	1/2"	10"	330 ft/lb
672903	SA1202	1/2"	15"	330 ft/lb
672918	SA1213	1/2" *	24"	330 ft/lb
673909	SA7508	3/4" *	24"	750 ft/lb
673911	SA7510	3/4" **	-	750 ft/lb
674909	SA1008	1"	26"	1,850 ft/lb

Replacement repair kits listed in the back of the catalogue

\*672918 and 673909 features heavy duty head design

\*\*673911 comes with head only - requires drive handle

CrV

### Ratcheting Breaker Bars

- Swivel head breaker bar with 24 tooth ratchet action
- Use in neutral position to break fasteners free, then employ ratchet for fast removal of fastener
- Can also be used to apply greater torque than is possible with standard 1/2" drive ratchets
- Chrome Molybdenum and Chrome Vanadium construction for professional use
- Repair kit available (**900289**)

PROD. NO.	MOD. NO.	Drive	Length
672932	JRBB-18	1/2"	18"
672933	JRBB-24	1/2"	24"

CrMo

CrV



**WARNING:** Do not use chrome sockets on impact wrenches

# SOCKET ACCESSORIES



## Speeder Handles

PROD. NO.	MOD. NO.	Drive	Length
671911	SA3811	3/8"	16"
672909	SA1208	1/2"	16-1/2"



## Sliding T-Handles

PROD. NO.	MOD. NO.	Drive	Length
670907	SA1406	1/4"	4-1/4"
671909	SA3809	3/8"	8"
672907	SA1206	1/2"	10"
673906	SA7505	3/4"	18"
673910	SA7509	3/4" *	Head Only
674904	SA1003	1"	22"



\*Requires drive handle (sold separately)

## Spinner Handles

PROD. NO.	MOD. NO.	Drive	Length
670912	SA1411	1/4"	6"

## T-Handle Spinner Wrenches

- Unique aluminum grip with bearings provides super smooth spinner action
- Adjustable grip can be used in 4 depth positions or removed for access to recessed areas
- Pull down locking collar keeps grip at desired location for most stable use
- 12" length reaches deep into engine bays and other confined spaces
- Chrome Vanadium steel for professional use
- Textured PVC coated T-handle for improved user comfort

## 3 PC T-Handle Spinner Wrench Set

- Comes in convenient EVA foam tool box organizer

PROD. NO.	MOD. NO.	Drive	Length	Pieces
690130	JSTH-3S	1/4, 3/8, 1/2"	12"	3

## OPEN STOCK

670930	-	1/4"	12"	1
671930	-	3/8"	12"	1
672930	-	1/2"	12"	1



**WARNING:** Do not use chrome sockets on impact wrenches



Grip adjust to 4 depth positions or can be removed entirely





690120



690121



672914

## SOCKET ACCESSORIES

- All components are forged from high quality Chrome Vanadium steel
- Meets or exceeds U.S. Federal Specs: GGG-W-641E and Canadian Government Specs: CDA39-GP-12b and ANSI specifications

## EXTENSION BARS

PROD. NO.	MOD. NO.	Pieces	Drive	Length
-----------	----------	--------	-------	--------

### SETS

690120	SE38-4S	4	3/8"	1-3/4, 3, 6, 10"
690121	SE12-3S	3	1/2"	2, 5, 10"
672914*	SE12-4S	4	1/2"	15, 18, 24, 30" (extra long)

\* Not CrV Steel

### OPEN STOCK

670904	SA1403	-	1/4"	2"
670905	SA1404	-	1/4"	3"
670915	SA1412	-	1/4"	4"
670906	SA1405	-	1/4"	6"
671904	SA1403	-	3/8"	1-3/4"
671905	SA3804	-	3/8"	3"
671907	SA3806	-	3/8"	6"
671908	SA3808	-	3/8"	10"
672904	SA1203	-	1/2"	2"
672905	SA1204	-	1/2"	5"
672906	SA1205	-	1/2"	10"
673903	SA7502	-	3/4"	4"
673904	SA7503	-	3/4"	8"
673905	SA7504	-	3/4"	16"
674903	SA1002	-	1"	16"
674905	SA1004	-	1"	8"



**WARNING:** Do not use chrome sockets on impact wrenches

## Locking Extension Bars

- Sockets and accessories lock on and cannot be removed until lock ring is retracted
- Keeps everything from ratchet to the socket positively connected, preventing lost pieces
- Especially useful when multiple extensions must be used
- Ideal for use with JET's quick release ratchet handles
- Coloured lock rings help identify drive size - a JET exclusive!
- Highest quality Chrome Vanadium steel for professional use

PROD. NO.	MOD. NO.	Pieces	Drive	Length
<b>SETS</b>				
690124	SE38-3SL	3	3/8"	3, 6, 10"
690125	SE12-3SL	3	1/2"	3, 5, 10"
<b>OPEN STOCK</b>				
671947	SA3804L	-	3/8"	3"
671948	SA3806L	-	3/8"	6"
671949	SA3808L	-	3/8"	10"
672947	SA1203L	-	1/2"	3"
672948	SA1204L	-	1/2"	5"
672949	SA1205L	-	1/2"	10"



690124



690125

**WARNING:** Do not use chrome sockets on impact wrenches



690122



690123

## SOCKET ACCESSORIES

### 2 Way Wobble Extension Bars

- Two position extensions provide regular or wobble drive
- Place socket in first position for wobble drive; allows improved access to hard-to-reach areas
- Push socket down to second position to lock it solidly in place; allows maximum torque
- Each extension replaces two others but doesn't cost twice as much
- Highest quality Chrome Vanadium steel for professional use

PROD. NO.	MOD. NO.	Pieces	Drive	Length
-----------	----------	--------	-------	--------


#### SETS

690122	SE38-4SW	4	3/8"	1-3/4, 3, 6, 10"
690123	SE12-3SW	3	1/2"	2, 5, 10"

#### OPEN STOCK

671951	SA3803W	-	3/8"	1-3/4"
671952	SA3804W	-	3/8"	3"
671953	SA3806W	-	3/8"	6"
671954	SA3808W	-	3/8"	10"
672951	SA1203W	-	1/2"	2"
672952	SA1204W	-	1/2"	5"
672953	SA1205W	-	1/2"	10"

CrV



**WARNING:** Do not use chrome sockets on impact wrenches