



SAFETY AND PRODUCTIVITY

DESIGN

With features like Partially Oriented Yarn shock absorbing lanyards and padded harnesses, our products are designed to keep workers comfortable, safe and secure.

QUALITY

From heavy duty polyester webbing to high grade steel hooks, only the best materials are used in our products.

STANDARDS

Our products meet or exceed CSA, ANSI and many other standards to ensure your safety on the job.

FALL PROTECTION

DID YOU KNOW?

Our team of fall protection experts are members of the committees which develop the standards designed to keep you safe.



PEACE OF MIND

PeakWorks Knows Fall Protection

From its inception in 2008, PeakWorks has been passionate about providing Canadian workers peace of mind when working at heights. The PeakWorks founders, with over 50 years of fall protection experience between them, set out to build a company that not only offered an industry-leading product line, but also provided their customers with value-added services supplying real solutions for both workers and the companies employing them. Today, as an integral part of our family of brands, we embrace those same principles. We know that the best fall protection is to eliminate the fall hazard in the first place. However, we also know that life doesn't always work that way. Our single goal, then, remains very simple: to ensure the best possible outcome when the unexpected occurs.

PeakWorks Embraces Industry Standards

Our in-house fall protection experts are driven to provide the best possible products and systems to ensure maximum worker safety. Like you, we live and work in Canada; and we are intimately knowledgeable about the strict regulations imposed in this country, which has the highest standards in the world. In fact, we are so dedicated to the advancement of worker safety that our fall protection experts are active members of both the CSA and ANSI standards committees. Not only do we adhere to these standards, we help to develop them!

PeakWorks Thrives on Problem Solving

PeakWorks is all about solving problems for workers at height. Our team of experts is available to consult on applications, hazard analysis training, recertification of products and much more. If you need help, we are just a phone call away!

PeakWorks is Proudly Canadian

Did we mention that PeakWorks is a Canadian brand with 100% Canadian focus? That's right. We understand the unique needs of the Canadian fall protection market including regional and national regulations, geographic challenges, and industry-specific requirements. Our entire product portfolio and package of services has been designed to meet or exceed almost every conceivable situation.

PeakWorks Offers Uncompromising Value

Great news! Not only have we developed a world class fall protection program, we have also made every effort to ensure that it is delivered at the best value to you, the customer. We have accomplished this without compromising product quality – your safety remains our primary objective. So give us a call and let us know how PeakWorks can not only exceed your safety expectations, but potentially lower your overall fall protection costs at the same time.

FALL PROTECTION DEFINED

What is Fall Protection?



Fall Protection refers to a series of regulated products or systems designed to protect workers from the risk of falls when working at height.

Types of Fall Protection

There are three basic types of fall protection available on the market:

Fall Restraint – Comprised of products or equipment which prevent a free fall from happening in the first place. The fall restraint system is designed to prevent a worker from ever reaching the edge or drop-off point when working at heights. Common examples: Guard Rails or Restraint Lanyards connected to Full Body Harnesses that are shorter in length than the distance from the Anchor Point to the Drop-Off Point.

Fall Arrest – Comprised of products, equipment or systems which stop a free fall once it occurs. These products are carefully designed and tested to stop a falling worker with minimal risk of injury. Common examples: Full Body Harnesses connected to Shock Absorbing Lanyards, or Self-Retracting Lifelines that are connected to an approved Anchor Point.

Work Positioning – Comprised of products or equipment which support or suspend a worker in order to allow the worker **to be positioned at their working point hands-free**. Common examples: Rebar Chain Assembly, Boatswain's Chairs, Descent Controllers.

Know Your A, B, C's

Fall protection systems are designed to prevent contacting a lower level if you fall from a height. There are several key components to these systems and it is important to know the basics.

A = Anchorage Connectors – The Anchorage is an engineered product which connects to some form of structure. The combination of these two critical components must be capable of withstanding the forces incurred during a fall. In Canada, these components must be capable of withstanding a minimum 5,000 lb (22 kN) of force. Common examples: Anchor Slings, Fixed D-Rings, Beam Anchors, Concrete Hole Anchors, Carabiners.

B = Body Support – The Body Support is the component that is worn on or around the torso. There are two types of Body Support:

Restraint Belt:

Belt that is installed at the waist and used for worker positioning and travel restraint. A Restraint Belt must NEVER be used for fall arrest.

Full Body Harness:

A Full Body Harness is a body support device that is installed on the entire body and is designed to distribute the forces of a fall to the shoulders, thighs and pelvis.

All Full Body Harnesses have a back D-ring designed for the fall arrest connection point. Other styles of Full Body Harnesses are available with other attachment points such as side D-rings for work positioning, a frontal D-ring for ladder climbing, and shoulder D-rings for confined space work. Some styles of harnesses can also have a combination of all or some of these attachment points, for example our Class APLE has the following connection points: (1) back D-ring, (2) side D-rings, (1) frontal D-ring and (2) shoulder D-rings.

Full Body Harnesses are the only accepted body support to be used for a fall arrest application. NEVER use a Restraint Belt in a fall arrest application.

C = Connectors – Connectors are the engineered components that connect the Body Harness or Body Belt to the appropriate Anchorage. Common examples: Shock Absorbing Lanyards, Self-Retracting Lifelines (SRL's), Restraint Lanyards, Lifelines.





PEAKWORKS®

HARNESSES



**SECURING
YOUR PEACE
OF MIND**

863



HARNESSES

Reference Guide

PeakWorks offers three series of harnesses: Compliance, Contractor, and PeakPro.

- Certified to both CSA Z259.10 and ANSI Z359 standards
- Meet or exceed all applicable OSHA standards
- 400-lb (180-kg) capacity (combined weight of person, tools, clothing, etc.)
- Sub-pelvic strap for added safety and support
- Fall indicator for easier inspection before use
- Polyester webbing



Example:
V8001000
(FBH-10002A)

Compliance



- Hi-viz green
- 3 points of adjustment ensuring a good fit (2 leg, 1 chest)
- Buckles: Pass-Thru (chest and legs)



Example:
V8002000
(FBH-10000A)

Contractor



- **Hi-viz green top and black bottom, easily visible and distinguishable for ease of donning**
- **5 points of adjustment ensure a good fit (2 leg, 2 torso, 1 chest)**
- Buckles: Pass-Thru (chest and legs), Pass-Thru or Grommets (legs)



Example:
V8006100
(FBH-60110A)

PeakPro



- Hi-viz green top and black bottom, easily visible and distinguishable for ease of donning
- 5 points of adjustment ensuring a good fit (2 leg, 2 torso, 1 chest)
- **Buckles: premium Stab Lock (chest), Stab Lock (legs) or Grommets (legs)**
- **Padded shoulder, back and leg straps for all-day comfort**



FULL BODY HARNESES

About Full Body Harnesses



- Full body harnesses are designed to arrest a fall while simultaneously distributing the tremendous shock or load to the worker's body.
- There are many applications and conditions in which full body harnesses must be worn. In order to maximize effectiveness and minimize injury, it is critical that an appropriate body harness be selected based on the job for which it is intended. PeakWorks offers a full range of body harnesses for almost every application.
- Full body harnesses must be fitted and tightened properly to ensure maximum protection and to minimize injury.
- Waist or restraint belts are not replacements for full body harnesses.
- All PeakWorks full body harnesses are built to meet or exceed the highest standards while providing maximum fit and comfort.

Harness Classes

- Full body harnesses come in many styles with a variety of attachment points (D-rings). The placement of these rings is critical to the type of application and positioning of the worker when performing a job.
- The fall protection industry and regulatory committees have standardized the positioning of these attachment rings into Harness Classes A, D, E, L, P.
- Depending on the application, full body harnesses may require more than one attachment class in order to correctly position the body and stress points during a fall, i.e. AE, AL, AP.
- All full body harnesses come with a standard Class A D-ring (located at the back between the shoulder blades).



Class A - Fall Arrest



Class D - Descent



Class E - Limited Access



Class L - Ladder



Class P - Work Positioning

Harness Hardware

- PeakWorks full body harnesses are available with a variety of buckle types for your convenience:



Pass-Thru Chest Strap



Pass-Thru Leg Strap



Grommeted Leg Strap



Stab Lock Chest or Leg Strap



Friction Torso Adjustment



Large Back D-Ring



Padded Back Support



Frontal D-Ring



FULL BODY HARNESSSES

Compliance Series



The PeakWorks Compliance Series harness is the best value on the market. When compliance and price are the keys drivers, this harness is the solution.

- Certified to both CSA Z259.10 and ANSI Z359 standards
- High visibility colour
- 3 points of adjustment ensuring a good fit (2 leg, 1 chest)
- Pass-Thru leg and chest buckles for quick donning
- Sub-pelvic strap for added safety and support
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Meets or exceeds all applicable OSHA standards
- Polyester webbing
- 400-lb (180-kg) capacity (combined weight of person, tools, clothing, etc.)



V8001000
FBH-10002A

PROD. NO.	MOD. NO.	Product Name	Class	Weight	Buckles			D-Ring Location		
					Chest	Leg	Torso	Back	Front	Sides
V8001000	FBH-10002A	Compliance Harness	A	2 lb (0.9 kg)	Pass-Thru	Pass-Thru		1		

FULL BODY HARNESSSES

Contractor Series



The PeakWorks Contractor Series is our most popular harness. With an impressive list of features, this harness offers incredible value.

- Certified to both CSA Z259.10 and ANSI Z359 standards
- High visibility colour
- Two-tone colour scheme for ease of donning
- Fully adjustable for a universal fit
- 5 points of adjustment ensure a good fit (2 leg, 2 torso, 1 chest)
- Pass-Thru leg and chest buckles for quick donning
- Grommeted leg straps available
- Sub-pelvic strap for added safety and support
- Polyester webbing
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Available in a variety of classes: A, AP, AL, AE, APLE
- Meets or exceeds all applicable OSHA standards
- 400-lb (180-kg) capacity (combined weight of person, tools, clothing, etc.)



V8002000
FBH-10000A



V8002210
FBH-10020B



V8002020
FBH-10000L



V8002030
FBH-10000E

PROD. NO.	MOD. NO.	Product Name	Class	Weight	Buckles			D-Ring Location			
					Chest	Leg	Torso	Back	Shoulders	Front	Sides
V8002000	FBH-10000A	Contractor Harness	A	2.5 lb (1.1 kg)	Pass-Thru	Pass-Thru	Friction	1			
V8002010	FBH-10000B	Contractor Harness	AP	3 lb (1.4 kg)	Pass-Thru	Pass-Thru	Friction	1			2
*V8002020	FBH-10000L	Contractor Harness	AL	3.5 lb (1.6 kg)	Pass-Thru	Pass-Thru	Friction	1		1	
V8002030	FBH-10000E	Contractor Harness	AE	3 lb (1.4 kg)	Pass-Thru	Pass-Thru	Friction	1	2		
V8002200	FBH-10020A	Contractor Harness	A	3 lb (1.4 kg)	Pass-Thru	Grommet	Friction	1			
V8002210	FBH-10020B	Contractor Harness	AP	3.5 lb (1.6 kg)	Pass-Thru	Grommet	Friction	1			2
V8002060	FBH-10000J	Contractor Harness	APLE	3.5 lb (1.6 kg)	Pass-Thru	Pass-Thru	Friction	1	2	1	2

* Not certified to ANSI Z359



FULL BODY HARNESSES

PeakPro Series



The PeakWorks PeakPro Series harness is our gold standard harness. With its legendary comfort, this harness can be worn comfortably all day long when working at heights.

- Certified to both CSA Z259.10 and ANSI Z359 standards
- High visibility colour
- Two-tone colour scheme for ease of donning
- Padded shoulder, back and leg straps for all-day comfort
- Fully adjustable for a universal fit
- 5 points of adjustment ensuring a good fit (2 leg, 2 torso, 1 chest)
- Stab Lock leg and chest buckles for quick donning
- Grommated leg straps available
- Sub-pelvic strap for added safety and support
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Available in a variety of classes: A, AP, AL
- Meets or exceeds all applicable OSHA standards
- Polyester webbing
- 400-lb (180-kg) capacity (combined weight of person, tools, clothing, etc.)

NEW Integrated Trauma Strap!



V8006100
FBH-60110A



V8006110
FBH-60110B



V8006120
FBH-60110L



V8006200
FBH-60120A

PROD. NO.	MOD. NO.	Product Name	Class	Weight	Buckles			D-Ring Location			
					Chest	Leg	Torso	Back	Shoulders	Front	Sides
V8006100	FBH-60110A	PeakPro Harness	A	3.5 lb (1.6 kg)	Stab Lock	Stab Lock	Friction	1			
V8006110	FBH-60110B	PeakPro Harness	AP	4 lb (1.8 kg)	Stab Lock	Stab Lock	Friction	1			2
V8006120	FBH-60110L	PeakPro Harness	AL	4 lb (1.8 kg)	Stab Lock	Stab Lock	Friction	1		1	
V8006200	FBH-60120A	PeakPro Harness	A	3.5 lb (1.6 kg)	Stab Lock	Grommet	Friction	1			
V8006210	FBH-60120B	PeakPro Harness	AP	4.5 lb (2 kg)	Stab Lock	Grommet	Friction	1			2

FULL BODY HARNESES

Full Body Harness/Belt Combos



- Lightweight for all-day comfort
- Offered with the Contractor series or PeakPro series harnesses
- Padded lumbar support designed to eliminate any discomfort from the weight of tool pouches
- Waist belt is designed to be removable, so a worker can add their favourite tool pouches with ease
- Positioning belt is designed with 2 side D-rings for any position applications
- Available with traditional Pass-Thru leg strap buckle or with tongue buckle



V825521X
FBH10020A1020-X



V825522X
FBH10000A1020-X



V825562X
FBH60110A1020-X

PROD. NO. (see table below)	MOD. NO.	Size (X)	Product Name	Class	Buckles			D-Ring Location			
					Chest	Leg	Torso	Back	Shoulders	Front	Sides
V825521_	FBH10020A1020-X	S, M, L, XL, XXL	Contractor Harness with Positioning Belt	AP	Pass-Thru	Grommet	Friction	1			2
V825522_	FBH10000A1020-X	S, M, L, XL, XXL	Contractor Harness with Positioning Belt	AP	Pass-Thru	Pass-Thru	Friction	1			2
V825562_	FBH60110A1020-X	S, M, L, XL, XXL	PeakPro Harness with Positioning Belt	AP	Stab Lock	Stab Lock	Friction	1			2
V825564_	FBH10000L1020-X	S, M, L, XL, XXL	Contractor Harness with Positioning Belt	APL	Pass-Thru	Pass-Thru	Friction	1		1	2
V825565_	FBH10000E1020-X	S, M, L, XL, XXL	Contractor Harness with Positioning Belt	APE	Pass-Thru	Pass-Thru	Friction	1	2		2

When ordering a belt, **PROD. NO.** refers to the product size, for example:

Size	PROD. NO.	MOD. NO.
S	V8255211	FBH10020A1020-S
M	V8255212	FBH10020A1020-M
L	V8255213	FBH10020A1020-L
XL	V8255214	FBH10020A1020-XL
XXL	V8255215	FBH10020A1020-XXL

Note: see belt sizing chart on page 870.

BELTS



The PeakWorks series of belts adds versatility and productivity to any PeakWorks harness.

- Lightweight for worker comfort
- Fits all PeakWorks harnesses
- Padded lumbar support made from closed cell foam
- Plated grommets for improved corrosion resistance
- Polyester webbing



Tongue Buckle



D-Ring



V805101X
WB-1010-X



V805601X
WB-6010-X



V8059
WB-6006



V805602X
WB-6020-X

Belt sizing chart:

Size	Min.	Max.
Small	32" (813 mm)	40" (1,016 mm)
Medium	36" (914 mm)	44" (1,118 mm)
Large	42" (1,067 mm)	48" (1,219 mm)
X-Large	44" (1,118 mm)	52" (1,321 mm)
XX-Large	48" (1,219 mm)	56" (1,422 mm)

PROD. NO. (see table below)	MOD. NO.	Size (X)	Product Name	D-Ring Location	
				Back	Sides
V805101_	WB-1010-X	S, M, L, XL, XXL	Restraint Belt	1	
V805601_	WB-6010-X	S, M, L, XL, XXL	PeakPro Restraint Belt with Padded Lumbar Support	1	
V805602_	WB-6020-X	S, M, L, XL, XXL	PeakPro Positioning Belt with Padded Lumbar Support		2
V8059	WB-6006	Universal	Padded Lumbar Support for Belt		

When ordering a belt, **PROD. NO._** refers to the product size, for example:

Size	PROD. NO.	MOD. NO.
S	V8051011	WB-1010-S
M	V8051012	WB-1010-M
L	V8051013	WB-1010-L
XL	V8051014	WB-1010-XL
XXL	V8051015	WB-1010-XXL



PEAKWORKS®

LANYARDS

CONNECTING
YOU SAFELY

871



LANYARDS

About Lanyards

- Lanyards are engineered products, and the critical connection component between the full body harness and the anchor. They are sometimes referred to as connectors.
- PeakWorks lanyards are designed and tested to comply to strict CSA and ANSI standards.
- There is a wide variety of lanyards to suit a wide range of applications.
- There are two common types of lanyards: Fall Restraint and Fall Arrest.

Fall Restraint Lanyards

- Fall restraint lanyards are a fixed-length connection and have no shock absorbing capability.
- These lanyards are designed to limit the distance a worker can move from the anchor point and towards the edge of the structure and should never be used when there is a risk of falling.

Fall Arrest Lanyards

- Lanyards for fall arrest applications are designed using two types of shock absorbing technology: POY (Partially Oriented Yarn) and SP (Shock Pack).
- The shock absorbing action of these lanyards limits and reduces the force of a fall on the worker, significantly reducing injury to the body.
- PeakWorks offers both styles of lanyards, POY (Partially Oriented Yarn) and SP (Shock Pack).

POY:

- POY (Partially Oriented Yarn) lanyards are woven in a manner that allows the yarn to stretch out when it has a load applied to it. The POY is encased in tubular webbing for maximum strength.

SP:

- SP (Shock Pack) lanyards are comprised of "tear webbing" which is woven in a manner that allows the webbing to tear when it has a load applied to it. This tearing absorbs a significant amount of downward force under load, reducing injury.
- This tear webbing is folded and shrink-wrapped into a compact 1 x 2 x 6" (2.5 x 5 x 15 cm) pack that is sewn into the lanyard next to the body connector.
- PeakWorks SP lanyards are available in two categories: E4 (worker weight of 100 to 254 lb [45 to 115 kg]) and E6 (worker weight of 200 to 386 lb [90 to 175 kg]).



SHOCK ABSORBING LANYARDS

Partially Oriented Yarn (POY)



PeakWorks Partially Oriented Yarn (POY) shock absorbing lanyards are certified to CSA Z259.11-05 standards.

- Made with a superior grade, heavy-duty tubular polyester outer jacket webbing with POY core
- Resists abrasions and harmful UV rays
- Several models feature extra-large 2-1/2" (64 mm) CSA-approved forged steel hooks
- A full-length internal energy absorber limits the arrest force to 900 lbs (4 kN) maximum
- Several styles are available for use in most field applications
- POY lanyards are available in the E4 category only (worker weight of 100 to 254 lbs [45 to 115 kg])



V810110X
SA-1000-X



V8101116
SA-1040-6



V810112X
SA-1002-X



V810120X
SA-20000-X



V810122X
SA-20022-X



V860100
Snap Hook



V860110
Form Hook



Soft Loop

PROD. NO.	MOD. NO.	Length in ft (m) (X)	Product Name	Hook Type		
				Body	Anchor	Anchor
V810110X	SA-1000-X	4, 6 (1.2, 1.8 m)	Shock Absorbing Lanyard, POY, Single Leg	Snap	Snap	
V8101116	SA-1040-6	6 (1.8 m)	Shock Absorbing Lanyard, POY, Single Leg	Loop	Snap	
V810112X	SA-1002-X	4, 6 (1.2, 1.8 m)	Shock Absorbing Lanyard, POY, Single Leg	Snap	Form	
V810120X	SA-20000-X	4, 6 (1.2, 1.8 m)	Shock Absorbing Lanyard, POY, Twin Leg 100% Tie Off	Snap	Snap	Snap
V810122X	SA-20022-X	4, 6 (1.2, 1.8 m)	Shock Absorbing Lanyard, POY, Twin Leg 100% Tie Off	Snap	Form	Form



SHOCK ABSORBING LANYARDS

Shock Pack (SP)



PeakWorks Shock Pack (SP) shock absorbing lanyards are certified to CSA Z259.11-05 standards.

- Made with a superior grade, heavy-duty 1-3/4" (45 mm) or 1" (25 mm) polyester webbing for maximum strength or 1/4" (6 mm) galvanized plastic coated cable, with tear webbing shock absorber
- Resists abrasions and harmful UV rays
- Several models feature extra-large 2-1/2" (64 mm), CSA-approved form hooks
- A tear-away absorber limits the arrest force to a maximum of 900 lbs (4 kN) for the E4 category or 1,300 lb (6 kN) for the E6 category
- Several styles are available for use in most field applications
- PeakWorks SP lanyards are available in two categories: E4 (worker weight of 100 to 254 lb [45 to 115 kg]) and E6 (worker weight of 200 to 386 lb [90 to 175 kg])



V8104306
SA-7400-6

V8104106A
SA-3400-6A

V810412X
SA-3402-X

V810415X
SA-3405-X

V810822X
SA-45522-X

V860100
Snap Hook

V860110
Form Hook

V8103172
SA-3207-2

PROD. NO.	MOD. NO.	Length in ft (m) (X) *A = Adjustable	Product Name	Webbing/ Cable	Hook Type		
					Body	Anchor	Anchor

E4 Shock Pack (SP) Lanyards - worker weight (including tools): 100-254 lb (45-115 kg)

V8103162	SA-3206-2	2 (0.6 m)	E4 Shock Absorbing Lanyard - SP - Single Leg - Snap & ADP Rope Grab - 2' (0.6 m)	1-3/4" (44 mm)	Snap	ADP Rope Grab	
V8103172	SA-3207-2	18 in (46 mm)	E4 Shock Absorbing Lanyard - SP - Single Leg - Snap & D-Ring - 18" (46 mm)	1-3/4" (44 mm)	Snap	D-Ring	
V810410X	SA-3400-X	4, 6, 6A* (1.2, 1.8 m),	E4 Shock Absorbing Lanyard - SP - Single Leg - Snap Hooks	1" (25 mm)	Snap	Snap	
V8104126A	SA-3402-6A	4, 6, 6A* (1.2, 1.8 m),	E4 Shock Absorbing Lanyard - SP - Single Leg - Snap & Form Hooks	1" (25 mm)	Snap	Form	
V810415X	SA-3405-X	4, 6 (1.2, 1.8 m)	E4 Shock Absorbing Lanyard - SP - Single Leg - 2 Snap Hooks & Tie Back	1" (25 mm)	Snap	Snap/Tie Back	
V810420X	SA-44000-X	4, 6 (1.2, 1.8 m)	E4 Shock Absorbing Lanyard - SP - Twin Leg 100% Tie Off - Snap Hooks	1" (25 mm)	Snap	Snap	Snap
V810422X	SA-44022-X	4, 6 (1.2, 1.8 m)	E4 Shock Absorbing Lanyard - SP - Twin Leg 100% Tie Off - Snap & Form Hooks	1" (25 mm)	Snap	Form	Form
V810425X	SA-44055-X	6 (1.8 m)	E4 Shock Absorbing Lanyard - SP - Twin Leg 100% Tie Off - Snap Hooks & Tie Backs - 6' (1.8 m)	1" (25 mm)	Snap	Snap/Tie Back	Snap/Tie Back
V810810X	SA-4500-X	4, 6 (1.2, 1.8 m)	E4 Shock Absorbing Lanyard - SP - Single Leg - Snap Hooks	1/4" (6 mm) Galv. Cable	Snap	Snap	
V810812X	SA-4502-X	4, 6 (1.2, 1.8 m)	E4 Shock Absorbing Lanyard - SP - Single Leg - Snap & Form Hooks	1/4" (6 mm) Galv. Cable	Snap	Form	
V810822X	SA-45522-X	4, 6 (1.2, 1.8 m)	E4 Shock Absorbing Lanyard - SP - Twin Leg 100% Tie Off - Snap & Form Hooks	1/4" (6 mm) Galv. Cable	Snap	Form	Form

E6 Shock Pack (SP) Lanyards - worker weight (including tools): 200-386 lb (90-175 kg)

V8104306	SA-7400-6	4, 6 (1.2, 1.8 m)	E6 Shock Absorbing Lanyard - SP - Single Leg - Snap Hooks	1" (25 mm)	Snap	Snap	
V8104326	SA-7402-6	4, 6 (1.2, 1.8 m)	E6 Shock Absorbing Lanyard - SP - Single Leg - Snap & Form Hooks	1" (25 mm)	Snap	Form	
V8104406	SA-84000-6	4, 6 (1.2, 1.8 m)	E6 Shock Absorbing Lanyard - SP - Twin Leg 100% Tie Off - Snap Hooks	1" (25 mm)	Snap	Snap	Snap
V8104426	SA-84022-6	4, 6 (1.2, 1.8 m)	E6 Shock Absorbing Lanyard - SP - Twin Leg 100% Tie Off - Snap & Form Hooks	1" (25 mm)	Snap	Form	Form

Preventing a fall is a better way of protecting workers than arresting a fall. For these applications, PeakWorks has a wide selection of fall restraint lanyards. Fall restraint lanyards should never be used if there is any risk of falling.

- Fall restraint lanyards are a fixed length connection and have no shock absorbing capability
- These lanyards are designed to limit the distance a worker can move from the anchor point and towards the edge of the structure and should never be used when there is a risk of falling
- PeakWorks restraint lanyards are made using two types of material – a rugged heavy-duty polyester webbing or a premium polyester rope – and with a variety of hook configurations
- PeakWorks restraint lanyards are available in 4' (1.2 m) and 6' (1.8 m) lengths



V81540X
LAN-3400-X



V81542X
LAN-3402-X



V815100X
LAN-1222-X



V815120X
LAN-1242-X



V860100
Snap Hook



V860110
Form Hook

PROD. NO.	MOD. NO.	Length in ft (m) (X)	Product Name	Hook Type	
				Body	Anchor
V81540X	LAN-3400-X	4, 6 (1.2, 1.8 m)	Restraint Lanyard with 1" (25 mm) Webbing	Snap	Snap
V81542X	LAN-3402-X	4, 6 (1.2, 1.8 m)	Restraint Lanyard with 1" (25 mm) Webbing	Snap	Form
V815100X	LAN-1222-X	4, 6 (1.2, 1.8 m)	Restraint Lanyard with 5/8" (16 mm) Rope	Snap	Snap
V815120X	LAN-1242-X	4, 6 (1.2, 1.8 m)	Restraint Lanyard with 5/8" (16 mm) Rope	Snap	Form




RETRACTABLE HORIZONTAL LIFELINES

T-Line

- The most versatile fall protection system available, the T-Line Safety System is a totally new approach to fall protection that can be used in most applications, including many that either aren't supported by existing systems or require expensive specially engineered systems
- Facilitates both horizontal and vertical freedom for the user. The system is self-retracting and self-tensioning
- Two models, one that will span up to 40' (12 m) and the XL version that will span up to 80' (24 m) in a single span
- Functions as both a self-retracting lifeline and a horizontal lifeline
- Works in both vertical and horizontal applications
- Easy to install
- Prevents the pendulum effect in the event of a fall
- Shorter fall arrest distances over large spans than most horizontal lifelines
- Each end can be mounted at different heights
- Integrated rescue winch
- Generates much lower forces on the anchors
- Can be easily serviced



PROD. NO.	MOD. NO.	Product Name	Length	Weight
V865240	T-LINE-40	Hybrid Vertical Horizontal Retractable Lifeline	40' (12 m)	50 lb (23 kg)
V865280	T-LINE-80	Hybrid Vertical Horizontal Retractable Lifeline	80' (24 m)	60 lb (27 kg)

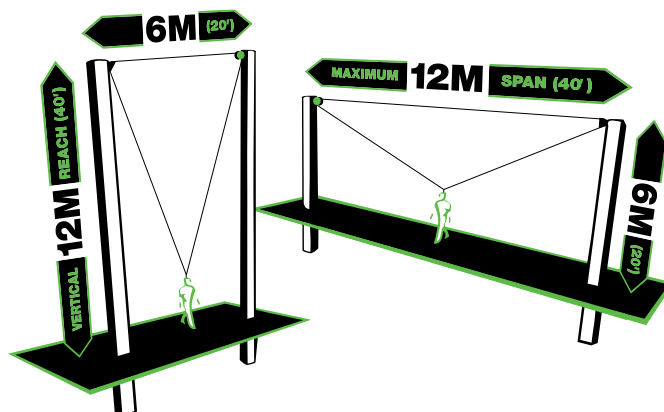

(Illustration for 40 ft (12 m) system)

V865240
T-LINE-40



PEAKWORKS®

**SELF-RETRACTING
LIFELINES**

**REACH YOUR
PEAK SAFETY
PERFORMANCE**

877



SELF-RETRACTING LIFELINES (SRL'S)

About Self-Retracting Lifelines

- Self-Retracting Lifelines (SRL's) are connectors that extend and retract as the worker moves around.
- SRL's use a locking mechanism similar to that of a seatbelt.
- Under normal use, the worker can move about while the SRL keeps them connected between the harness and anchor point.
- If the worker slips or falls, the mechanism locks the SRL, preventing further extension of the lifeline.
- SRL's offer the worker the greatest amount of mobility and work distance from the anchor point.
- SRL's offer shorter stopping distances than traditional lanyards.



SELF-RETRACTING LIFELINES (SRL'S)

- PeakWorks has introduced a new series of premium Self-Retracting Lifelines
- Manufactured in Germany to exacting specifications using lightweight aluminum or plastic housings for maximum operator comfort
- Certified to CSA Z259.2.1
- Aluminum units are available using heavy-duty polyester webbing or galvanized steel cable
- Plastic housing units available with heavy-duty webbing only
- PeakWorks webbing SRL's are manufactured using special 0.1" (2.5 mm) thick, 1" (25 mm) wide Dyneema® Core materials, giving them one of the highest performances of this type of fibre in the world
- The anchor point incorporates a heavy-duty, durable and convenient swivel eye
- SRL's with webbing feature a sewn-in indicator on the lifeline itself for maximum safety
- Rescue units come with release pins and a two-way winding handle to engage the rescue/recovery mode
- Available in lengths from 6 to 108 ft (1.8 to 33 m)
- Available in single and double leg versions
- 300 lb (136 kg) capacity for 1 worker (combined weight of person, tools, clothing, etc.)

LEADING EDGE SELF-RETRACTING LIFELINES

- Leading Edge (LE) self-retracting lifelines are designed to protect the worker when operating near an edge and where a fall hazard exists that could cause the lifeline to come into contact with the edge
- Leading Edge SRL's provide additional protection against sharp or abrasive surfaces found on many construction sites
- A Leading Edge SRL can be mounted below a worker's fall arrest D-Ring (please refer to instruction manual for details)
- **Certified to CSA Z259.2.2-98** (for non-Leading Edge applications) and **ANSI Z359.14** (for Leading Edge applications)
- **No external shock absorber** – We are the only manufacturer that offers LE certified units which can be used without external shock absorbers
- Lightweight units can be mounted on a worker's harness for better mobility and range of motion
- All LE products are clearly marked to ensure the correct SRL is used for Leading Edge applications

SELF-RETRACTING LIFELINES (SRL'S)



V84511008
SRL-10301-8



V845523006
SRL-50302-6



V8454230XX
SRL-40302-XX



V845525007
SRL-50502-7



V845526007
SRL-50602-7



V8455330XX
SRL-53302-XX



V8455340XX
SRL-53303-XX



PROD. NO.	MOD. NO.	Product Name	ANSI Z359.14-2012 LE Certified	Housing	Webbing/Cable	Length in ft (m)	CSA Z259.2.2-98 Type
V84511008	SRL-10301-8	SRL with Webbing, Snap Hook	No	Steel Frame	1-3/4" (45 mm) Webbing	8 (2.4 m)	1
V845523006LE	SRL-50302-6LE	SRL with Webbing, Snap Hook	Yes	Aluminum	1" (25 mm) Webbing	6 (1.8 m)	2
V845423012	SRL-40302-12	SRL with Webbing, Snap Hook	No	Plastic	1" (25 mm) Webbing	12 (3.5 m)	2
V845423018	SRL-40302-18	SRL with Webbing, Snap Hook	No	Plastic	1" (25 mm) Webbing	18 (5.5 m)	2
V845525007LE	SRL-50502-7LE	SRL with Webbing, Twin Leg, Snap Hook	Yes	Aluminum	1" (25 mm) Webbing	7 (2 m)	2
V845526007LE	SRL-50602-7LE	SRL with Webbing, Twin Leg, Form Hook	Yes	Aluminum	1" (25 mm) Webbing	7 (2 m)	2
V845533020LE	SRL-53302-20LE	SRL with Galv. Steel Cable, Snap Hook	Yes	Aluminum	3/16" (5 mm) Cable	20 (6 m)	2
V845533040LE	SRL-53302-40LE	SRL with Galv. Steel Cable, Snap Hook	Yes	Aluminum	3/16" (5 mm) Cable	40 (12 m)	2
V845533060LE	SRL-53302-60LE	SRL with Galv. Steel Cable, Snap Hook	Yes	Aluminum	3/16" (5 mm) Cable	60 (18 m)	2
V845534060	SRL-53303-60	SRL with Galv. Steel Cable, Rescue/Recovery, Snap Hook	No	Aluminum	3/16" (5 mm) Cable	60 (18 m)	3
V845534108	SRL-53303-108	SRL with Galv. Steel Cable, Rescue/Recovery, Snap Hook	No	Aluminum	3/16" (5 mm) Cable	108 (33 m)	3



ANCHORAGE CONNECTORS

Anchors and Roof Brackets

- A complete fall arrest system requires three primary components: approved full body harness, connector and anchorage connector
- Anchors can be connected to a variety of materials such as steel, wood and concrete
- PeakWorks offers a wide range of anchor systems including: single-use/reusable roof anchors, sliding beam anchors, concrete hole anchors and permanent anchors
- The anchor should be located directly above the worker to prevent swinging
- The height of an anchor is a key variable when determining fall clearance
- As with all fall protection products, anchors must be inspected by a competent person at a minimum annually
- All PeakWorks anchors are built with a minimum tensile strength of 5,000 lb (22 kN)
- All PeakWorks anchors meet or exceed CSA Z259.15 and ANSI Z359.18 standards and OSHA requirements
- 310 lb (141 kg) capacity for 1 worker (combined weight of person, tools, clothing, etc.)



V822111X
CP-10011-X



V8229001
RB-9701



V8229100
RB-9800



V8221114
CP-10010-1



V8221115
CP-10010-2



V8221121
CP-12010-2



V8229104
RB-9900



V8222120
CP-12010-1



V8222130
CP-11010-1

PROD. NO.	MOD. NO.	Product Name	Application
V8221111	CP-10011-1	Permanent Anchorage with 1/2" (13 mm) Hole	Permanent
V8221112	CP-10011-2	Permanent Anchorage with 5/8" (16 mm) Hole	Permanent
V8221113	CP-10011-3	Permanent Anchorage with 3/4" (19 mm) Hole	Permanent
V8229001	RB-9701	Single-Use Roof Bracket	Temporary
V8229100	RB-9800	Reusable Roof Anchor Bracket	Temporary
V8221114	CP-10010-1	5K Concrete Swivel Anchor with 5/8" (16 mm) Sleeve Anchor	Permanent
V8221115	CP-10010-2	5K Steel Swivel Anchor with 1/2" x 4" (13 mm x 102 mm) G8 Steel Bolt Lock Washer and Lock Nut	Permanent
V8221121	CP-12010-2	3/4" (19 mm) Toggle-Lok Anchor	Temporary
V8229104	RB-9900	Stainless Steel Reusable Roof Anchor Bracket	Temporary
V8222120	CP-12010-1	3/4" (19 mm) Concrete Hole Anchor	Temporary
V8222130	CP-11010-1	Adjustable Sliding Beam Anchor - Fits Beam Flange Width of 3.5" to 13.25" (88.9 mm to 336.6 mm)	Temporary

ANCHORAGE CONNECTORS

Anchor Slings



- Anchor slings provide peace of mind when a temporary anchor is required
- PeakWorks offers anchor slings using two basic material styles: abrasion-resistant webbing or galvanized cable
- All PeakWorks anchor slings are built to a minimum tensile strength of 5,000 lb (22 kN)
- All PeakWorks anchor slings meet or exceed CSA and ANSI standards



V820310X
RAS3-X



V820350X
CAS-X



V820800X
AS-21000-X



V820840X
AS-21210-X



V820860X
AS-21110-X

PROD. NO.	MOD. NO.	Length in ft (m) (X)	Product Name	End Configuration	
				End 1	End 2
V820310X	RAS3-X	3, 4, 6 (0.9, 1.2, 1.8 m)	Residential Anchor Sling	Reinforced Loop	Loop
V820350X	CAS-X	3, 4, 6 (0.9, 1.2, 1.8 m)	Commercial Anchor Sling	Loop	D-Ring
V820800X	AS-21000-X	4, 6 (1.2, 1.8 m)	Cable Anchor Sling, 1/4" (6 mm) PVC Coated Galv. Cable	Eye	Eye
V820840X	AS-21210-X	4, 6 (1.2, 1.8 m)	Cable Anchor Sling, 1/4" (6 mm) PVC Coated Galv. Cable	Snap Hook	O-Ring
V820860X	AS-21110-X	4, 6 (1.2, 1.8 m)	Cable Anchor Sling, 1/4" (6 mm) PVC Coated Galv. Cable	O-Ring	O-Ring





ROPE GRABS AND LIFELINES

Rope Grabs

- All PeakWorks rope grabs are certified to CSA Z259.2.5-2012 and meet ANSI Z359 standards
- Rope grabs are designed to travel hands-free on 5/8" (16 mm) rope
- These automatic rope grabs follow the user during their ascent or descent
- In the event of a fall, the rope grab will "bite" onto the rope and arrest the user's fall
- PeakWorks rope grabs are also equipped with a panic lock feature which "bites" onto the rope even if the user mistakenly pushes the cam up, ensuring that the rope grab will lock and arrest the fall in any situation
- Rope grabs offer the most cost-effective fall protection solution when working at height
- Cable grabs are designed for use on 3/8" (9.5 mm) cable
- 300 lb (136 kg) capacity (combined weight of person, tools, clothing, etc.)



V83010
RG-11010



V83011
RG-11000



V83012
RG-21000 *



V83021
CG-9001 *

PROD. NO.	MOD. NO.	Product Name	Rope/Cable	
			Size	Type
V83010	RG-11010	ADP Rope Grab with Panic Grab, Small Eye	5/8" (16 mm)	3 Strand
V83011	RG-11000	ADP Rope Grab with Panic Grab, Large Eye	5/8" (16 mm)	3 Strand
*V83012	RG-21000	ADP Rope Grab (SS) with Panic Grab, Large Eye	5/8" (16 mm)	3 Strand
*V83021	CG-9001	Cable Grab for 3/8" (10 mm) Cable	3/8" (10 mm)	Galvanized Cable

* Meet or exceed CSA Z259.2.5-2012



ROPE GRABS AND LIFELINES

Lifelines

- All PeakWorks lifelines are certified to CSA Z259.2.5-2012 and meet ANSI Z359 standards
- Lifelines are specially designed from rope made using high-strength polysteel
- Polysteel is an extruded co-polymer fibre that yields an extremely high-strength, lightweight rope with excellent resistance to acids and alkalis
- PeakWorks vertical lifelines are all 5/8" (16 mm) in diameter
- Minimum breaking strength 6,000 lb (27 kN)
- We offer a wide range of lengths with a variety of snap hook/carabiner options
- All PeakWorks lifelines have a back splice at the trailing end to prevent the rope grab from coming off the end of the lifeline



V84013XXX
VL-1115-X



V84014XXX
VL-1125-X



PROD. NO.	MOD. NO.	Length in ft (m) (X)	Product Name	End Configuration	
				Anchor End	Trailing End
V84013XXX	VL-1115-X	25, 50, 100 (7.6, 15.2, 30.5 m)	Vertical Lifeline, 5/8" (16 mm) Rope	Carabiner	Back Splice
V84014XXX	VL-1125-X	25, 50, 100 (7.6, 15.2, 30.5 m)	Vertical Lifeline, 5/8" (16 mm) Rope	Snap Hook	Back Splice

Note: other lengths available as a special order.

PeakWorks has kits configured by application and working environment, making it easy to choose the right product for the job.

- *All PeakWorks kit components are certified to the applicable CSA standards.*
- *PeakWorks offers a wide range of pre-packaged fall protection kits that include specific full body harnesses and connectors and, in the case of roofer's kits, a shock-absorbing panic rope grab and anchor.*
- *PeakWorks kits come in a waterproof pail or a breathable bag for convenient storage.*





PEAKWORKS®

KITS



885



KITS
Roofer's Kits



V8257022
RK2-25:

- **FBH-10000A** Contractor Harness
- **SA-3206-2** SP Lanyard with Integral ADP Rope Grab
- **VL-1825-25** Vertical Lifeline
- **RB-9800** Reusable Roof Bracket
- 15 l (4 gal) Waterproof Pail

V8257025
RK2-50:

- **FBH-10000A** Contractor Harness
- **SA-3206-2** SP Lanyard with Integral ADP Rope Grab
- **VL-1825-50** Vertical Lifeline
- **RB-9800** Reusable Roof Bracket
- 15 l (4 gal) Waterproof Pail



V8257032
RK3-25:

- **FBH-10002A** Compliance Harness
- **SA-3206-2** SP Lanyard with Integral ADP Rope Grab
- **VL-1125-25** Vertical Lifeline
- **RB-9701** Single-Use Roof Bracket
- 4" Spiral Ardox® Nails (Bag of 8)
- 15 l (4 gal) Waterproof Pail

V8257035
RK3-50:

- **FBH-10002A** Compliance Harness
- **SA-3206-2** SP Lanyard with Integral ADP Rope Grab
- **VL-1125-50** Vertical Lifeline
- **RB-9701** Single Use Roof Bracket
- 4" Spiral Ardox® Nails (Bag of 8)
- 15 l (4 gal) Waterproof Pail



V8257042
RK4-25:

- **FBH-10002A** Compliance Harness
- **SA-3206-2** SP Lanyard with Integral ADP Rope Grab
- **VL-1825-25** Vertical Lifeline
- **RB-9800** Reusable Roof Bracket
- 15 l (4 gal) Waterproof Pail

V8257045
RK4-50:

- **FBH-10002A** Compliance Harness
- **SA-3206-2** SP Lanyard with Integral ADP Rope Grab
- **VL-1825-50** Vertical Lifeline
- **RB-9800** Reusable Roof Bracket
- 15 l (4 gal) Waterproof Pail


BEST-SELLER



V8257055
RK5-50:

- **FBH-10002A** Compliance Harness
- **SA-3200-2.5** SP Lanyard with regular snap hooks
- **RG-11010** ADP Rope Grab
- **VL-1825-50** Vertical Lifeline
- **RB-9800** Reusable Roof Bracket
- 15 l (4 gal) Waterproof Pail

PROD. NO.	MOD. NO.	Length in ft (m) (X)	Product Name
V825702X	RK2-X	25, 50 (7.6, 15.2 m)	Contractor Roofer's Kit with Reusable Bracket and 2' (0.6 m) SP Lanyard with Integral ADP Rope Grab
V825703X	RK3-X	25, 50 (7.6, 15.2 m)	Compliance Roofer's Kit with Single-Use Bracket and 2' (0.6 m) SP Lanyard with Integral ADP Rope Grab
V825704X	RK4-X	25, 50 (7.6, 15.2 m)	Compliance Roofer's Kit with Reusable Bracket and 2' (0.6 m) SP Lanyard with Integral ADP Rope Grab
V8257055	RK5-50	50 (15.2 m)	Compliance Roofer's Kit with Reusable Bracket and 2.5' (0.7 m) SP Lanyard and Non-Integral ADP Rope Grab

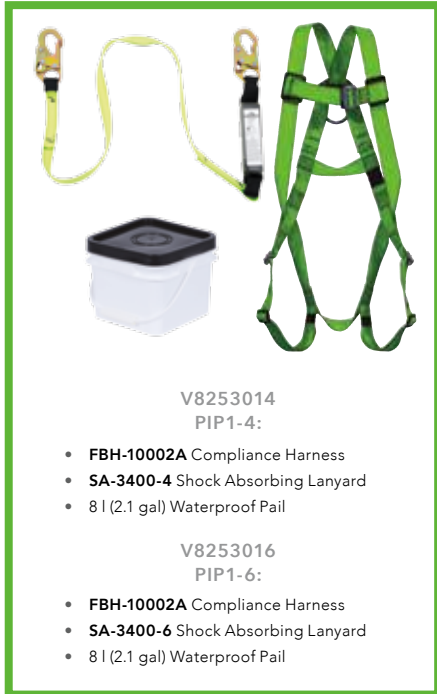V8253014
PIP1-4:

- **FBH-10002A** Compliance Harness
- **SA-3400-4** Shock Absorbing Lanyard
- 8 l (2.1 gal) Waterproof Pail

V8253016
PIP1-6:

- **FBH-10002A** Compliance Harness
- **SA-3400-6** Shock Absorbing Lanyard
- 8 l (2.1 gal) Waterproof Pail

BEST-SELLER



- V8253024
PIP2-4:
- **FBH-10002A** Compliance Harness
 - **SA-3402-4** Shock Absorbing Lanyard
 - 8 l (2.1 gal) Waterproof Pail

- V8253026
PIP2-6:
- **FBH-10002A** Compliance Harness
 - **SA-3402-6** Shock Absorbing Lanyard
 - 8 l (2.1 gal) Waterproof Pail



- V8253074
PIP7-4:
- **FBH-10000A** Contractor Harness
 - **SA-1000-4** Shock Absorbing Lanyard
 - 8 l (2.1 gal) Waterproof Pail

- V8253076
PIP7-6:
- **FBH-10000A** Contractor Harness
 - **SA-1000-6** Shock Absorbing Lanyard
 - 8 l (2.1 gal) Waterproof Pail



- V8253084
PIP8-4:
- **FBH-10000A** Contractor Harness
 - **SA-1002-4** Shock Absorbing Lanyard
 - 8 l (2.1 gal) Waterproof Pail

- V8253086
PIP8-6:
- **FBH-10000A** Contractor Harness
 - **SA-1002-6** Shock Absorbing Lanyard
 - 8 l (2.1 gal) Waterproof Pail

PROD. NO.	MOD. NO.	Length in ft (m) (X)	Product Name
V825301X	PIP1-X	4, 6 (1.2, 1.8 m)	Compliance PIP Kit with SP Lanyard, 2 Snap Hooks
V825302X	PIP2-X	4, 6 (1.2, 1.8 m)	Compliance PIP Kit with SP Lanyard, Snap & Form Hooks
V825307X	PIP7-X	4, 6 (1.2, 1.8 m)	Contractor PIP Kit with POY Lanyard, 2 Snap Hooks
V825308X	PIP8-X	4, 6 (1.2, 1.8 m)	Contractor PIP Kit with POY Lanyard, Snap & Form Hooks



KITS
Fall Protection Kits



V8252096
FK-001:

- **FBH-10002A** Compliance Harness
- **SA-1040-6** Shock Absorbing Lanyard
- **BAG-001** Large Mesh Bag



V8252116
FK-002:

- **FBH-10000A** Contractor Harness
- **SA-1000-6** Shock Absorbing Lanyard
- **BAG-001** Large Mesh Bag



V8252036
FK-003:

- **FBH-10002A** Compliance Harness
- **SA-3400-6** Shock Absorbing Lanyard
- **BAG-001** Large Mesh Bag



V8252034
FK-004:

- **FBH-10002A** Compliance Harness
- **SA-3400-4** Shock Absorbing Lanyard
- **BAG-001** Large Mesh Bag



V8252196
FBH-10000A1040-6:

- **FBH-10000A** Contractor Harness
- **SA-1040-6** Shock Absorbing Lanyard

PROD. NO.	MOD. NO.	Product Name
V8252096	FK-001	Compliance Fall Protection Kit with 6' (1.8 m) POY Lanyard
V8252116	FK-002	Contractor Fall Protection Kit with 6' (1.8 m) POY Lanyard
V8252036	FK-003	Compliance Fall Protection Kit with 6' (1.8 m) SP Lanyard
V8252034	FK-004	Compliance Fall Protection Kit with 4' (1.2 m) SP Lanyard
V8252196	FBH-10000A1040-6	Contractor Fall Protection Kit with 6' (1.8 m) POY Lanyard

- Canadian law states that every company must be prepared for a rescue and therefore every fall protection application and work environment must have a pre-planned rescue system established.
- As time is critical when responding to a worker in need, it is incumbent upon all job sites to have the right equipment and proper training available in case of an emergency.
- PeakWorks offers a wide range of equipment and training to help you develop the rescue system required for your specific application.
- Contact your representative for details.

RES-Q-Pole

- The PeakWorks Res-Q-Pole with Res-Q-Head is an innovative and effective solution designed to remotely connect a carabiner to a fallen worker or anchor
- The pole is a strong yet lightweight fibreglass-constructed telescoping pole that reaches from 6 to 12' (1.8 to 3.7 m)
- A lightweight bracket holds the carabiner open until the operator hooks onto the victim's D-ring or anchor and pulls back. At that point the carabiner is released from the head and snaps shut
- Designed for use with the CP-03015-1 carabiner (sold separately)

RES-Q-Kit

- The Res-Q-Kit is a unique 4:1 100' (30.4 m) raise and lower kit; it allows a person to be lowered using friction or raised by using a mechanical one-directional pulley
- The Res-Q-Kit is our most effective retrieval kit



V855121
RES-Q-POLE w RES-Q-HEAD



V85523100
RES-Q-KIT 100'



V860120
CP-03015-1
(Carabiner sold separately)

PROD. NO.	MOD. NO.	Product Name
V855121	RES-Q-POLE w RES-Q-HEAD	Rescue Pole, Telescoping 6 to 12' (1.8 m to 3.7 m), with Rescue Head Carabiner Attachment
V85523100	RES-Q-KIT 100'	Res-Q-Kit, 100' (30.4 m)


About Confined Space

- OHS Regulations define a confined space as an area, other than an underground working, that:
 - is enclosed or partially enclosed;
 - is not designed or intended for continuous human occupancy;
 - has limited or restricted means for entry or exit that may complicate the provision of first aid, evacuation, rescue or other emergency response or service;
 - is large enough and so configured that a worker could enter to perform assigned work.
- Confined space has limited openings for entry and exit. Examples would be spaces such as: silos, vats, ship holds, sewers, tunnels, large pipelines and other such spaces that humans could enter to perform work.

FALL PROTECTION FOR CONFINED SPACE



- The PeakWorks engineering team has developed a unique tripod with distinct advantages over the competition
- The PeakWorks TR-100 Tripod offers a built-in pulley system that is located above the head assembly
- The placement of this pulley situates the wire rope cable directly over the centre point of the tripod for superior perfect operator balance
- Locating the pulley system above the head assembly also allows the operator increased head room over traditional "below-the-head" pulley systems
- The PeakWorks TR-100 features adjustable aluminum legs complete with swivel steel feet and non-slip rubber bases
- The TR-100 can be used with a 65' (20 m) Man Rated Winch (MW-65G) or, by attaching the tripod mounting bracket, with a PeakWorks SRL-53303 60' (18 m) or 108' (33 m) recovery style SRL
- 7' (2 m) tripod features adjustable locking legs, two additional anchorage points, non-slip safety feet and safety chain
- Meets or exceeds CSA Z259.15 and ANSI Z359.18 and OSHA requirements
- MW-65G man winch features 65' (20 m) galvanized cable with swivel hook, 300 lb (135 kg) capacity
- 310 lb (141 kg) capacity (combined weight of person, tools, clothing, etc.)

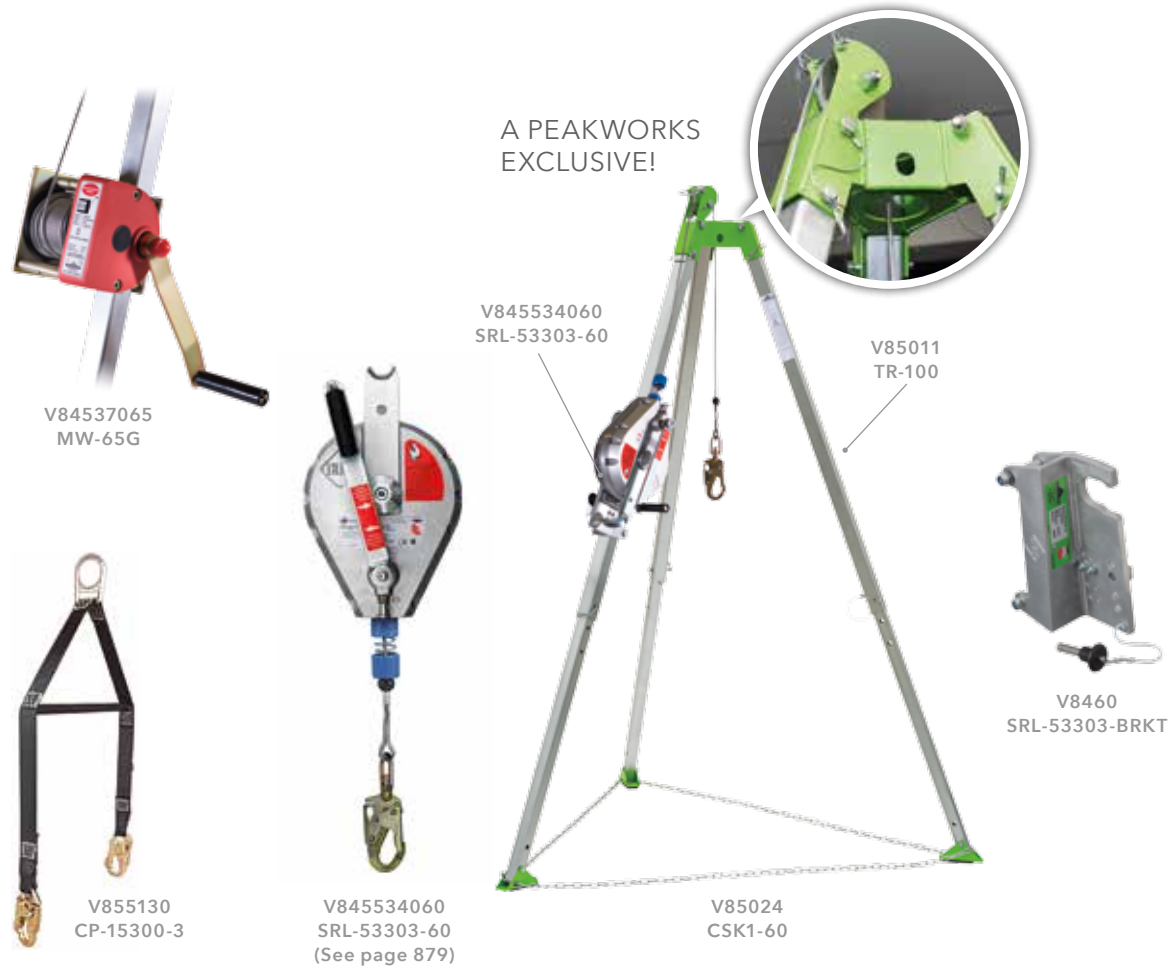

PROD. NO.	MOD. NO.	Product Name
V85011	TR-100	7' (2 m) Tripod with Chain and Pulley
V84537065	MW-65G	65' (20 m) Man Winch with 3/16" (5 mm) Cable and Swivel Hook
V85024	CSK1-60	Confined Space Kit: Tripod, 3-Way 60' (18 m) SRL and Bag
V85025	CSK2-65	Confined Space Kit: Tripod, 65' (20 m) Man Winch and Bag
V85026	CSK3-60	Confined Space Kit: Tripod, 3-Way 60' (18 m) SRL, 65' (20 m) Man Winch and Bag
V860005	BAG-005	Tripod Carrying Bag
V855130	CP-15300-3	Confined Space Yoke
V860151	CP-41210-1	Aluminum Pulley – Single Oscillating Side Plates
V860152	CP-41210-2	Aluminum Pulley – Double Oscillating Side Plates
V8460	SRL-53303-BRKT	Tripod Mounting Bracket for SRL-53303



V860001
BAG-001



V860004
BAG-004



V860901
MERCHANDISING TORSO



V860005
BAG-005



V860402
RFID-1



V860130
CP-04011-1



V860120
CP-03015-1



V860121
CP-03015-2



V860301
FBH-PAD



V860140
RA-100



V860304
CP-22300-1



V860303
CP-23300-1



V860302
CP-14010



V860151
CP-41210-11



V860152
CP-41210-2

PROD. NO.	MOD. NO.	Product Name	PROD. NO.	MOD. NO.	Product Name
V860001	BAG-001	Large Mesh Harness Bag 15" x 12" (38 cm x 31 cm)	V860140	RA-100	Rebar Assembly
V860004	BAG-004	PeakWorks Carrying Bag 10" x 12" x 12" (25 cm x 31 cm x 31 cm)	V860304	CP-22300-1	Tool Lanyard
V860005	BAG-005	Tripod Carrying Bag for TR-100 10" x 58" x 10" (147 cm x 25 cm x 25 cm)	V860303	CP-23300-1	Trauma Strap
V860402	RFID-1	RFID Pouch with Grommet	V860302	CP-14010	D-Ring Extender 18" (46 cm)
V860130	CP-04011-1	Carabiner 2" (50 mm) CSA for Scaffolding	V860151	CP-41210-1	Aluminum Pulley - Single Osc. Side Plates
V860901	MERCH. TORSO	Merchandising Torso for Harness	V860152	CP-41210-2	Aluminum Pulley -. Double Osc. Side Plates
V860120	CP-03015-1	Carabiner 1" (25 mm) CSA CE			
V860121	CP-03015-2	Carabiner 3/4" (19 mm) CSA for CG-9001 & SRL-10301-8)			
V860301	FBH-PAD	Removable Back Pad for PW harnesses			



PEAKWORKS SERVICES

Audit

Every company is required to have a fall protection plan. A thorough fall protection plan must begin with an audit of the worksite or facility. The PeakWorks audit process identifies all of the fall hazards at the workplace and reviews the current fall protection practices in place. A PeakWorks audit will recommend systems, products, and the procedures to eliminate or mitigate the risk of working at heights.

Inspection and Cleaning

PeakWorks' RFID Inspection system is a fast, easy and reliable way to inspect your PPE. The RFID chip is the key to the system, integrating each piece of equipment with the product type, date of manufacture, serial number and relevant product standards. PeakWorks' inspection customers receive a timely email informing them when equipment is due for inspection.



Search "PeakWorks" to download our free Fall Clearance Calculator App



CSA Z259.1-05 (R2010).....	Safety Belts and Saddles for work positioning and travel restraint
CSA Z259.2.2-98 (R2009).....	Self-Retracting Devices for Personal Fall-Arrest Systems
CSA Z259.2.3-12	Descent Control Devices
CSA Z259.2.4-15.....	Fall Arrester and Fixed Rigid Rails
CSA Z259.2.5-12.....	Fall Arresters and Vertical Lifelines
CSA Z259.10-12	Full Body Harness
CSA Z259.11-05 (R2010)	Energy Absorbers and Lanyards
CSA Z259.12-11	Connecting Components for Personal Fall Arrest Systems
CSA Z259.13-04 (R2009)	Flexible Horizontal Lifelines
CSA Z259.14-12	Fall Restrict Equipment for Wood Pole Climbing
CSA Z259.15-12	Anchorage Connectors
CSA Z259.16-04 (R2009)	Design of Active Fall Protection Systems

Canadian Standards Association

178 Rexdale Boulevard
 Toronto, Ontario M9W 1R3
www.csa.ca

OSHA REGULATIONS GOVERNING CONSTRUCTION (29 CFR PART 1926)

Subpart E covers various requirements for personal protective equipment.

Safety Belts, Lifelines and Lanyards	1926.104
Safety Nets.....	1926.105

Subpart L covers Scaffolds.....1926.450-454

Subpart M covers fall protection fully, including when and where fall protection systems are required and for what construction work activities. It also defines system component requirements.

Scope, Application and Definitions.....	1926.500
Duty to Have Fall Protection	1926.501
Fall Protection Systems Criteria and Practices	1926.502
Training Requirements.....	1926.503

Subpart X covers Ladders.....1926.1053

OSHA REGULATIONS GOVERNING GENERAL INDUSTRY (29 CFR PART 1910)

Subpart D mentions a few specific Fall Protection requirements relative to walking/working surfaces.

Fixed Ladders, Ladder Safety Devices.....	1910.27(d)(5)
Safety Requirements for Scaffolding, Boatswain's Chairs.....	1910.28(j)(4)

Subpart F covers fall protection as it pertains to powered platforms, man lifts, and vehicle mounted work platforms.

Maintenance	1910.66
Personal Fall Arrest Systems.....	1910.66

Subpart J covers general environmental controls in which confined spaces are addressed.

Confined Spaces.....	1910.146
----------------------	----------

ANSI STANDARDS GOVERNING CONSTRUCTION AND DEMOLITION OPERATIONS

Safety Requirements for Personal Fall Arrest Systems, Subsystems and Components.....	Z359.1-2007
--	-------------

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

11 West 42nd Street
 New York, NY 10036
www.ansi.org