

**Poly Coated Duct**

**Masking**

**Specialty**

**Double-Sided**

**Strapping**

**Electrical**

**Film**

**Box Sealing**

**Construction**

**Dispensers**



## **Industrial Catalogue**

[cantech.com](http://cantech.com)



# Quick Reference Guide

Code	Poly Coated Duct Tapes	
88-21	Production grade poly coated cloth tape	2
93-21	Economy grade poly coated cloth tape	2
94-**	General purpose poly coated cloth tape	2
96-21	Industrial grade poly coated cloth tape	2
98-**	Contractor grade poly coated cloth tape	2
99-21	Premium grade poly coated cloth tape	2

Code	Masking Tapes	
101-00	Industrial grade masking tape	3
102-00	Utility grade masking tape	3
103-00	Economy industrial masking tape	3
105-00	Temperature performance masking tape	3
107-00	General purpose masking	3
109-07	Premium safe tack green masking tape	3
118-08	UV resistant 30 day blue masking tape	3
120-**	Coloured masking tape	3
122-00	Production grade masking tape	3
127-00	OEM grade masking tape	3
129-05	High temperature performance masking tape	3

Code	Specialty Tapes - Single Coated	
91-21	Premium aluminum foil tape	4
133-04	Extensible flatback Kraft tape - non SIS adhesive	4
134-04	Extensible flatback Kraft splicing tape	4
139-04	Extensible flatback Kraft box sealing tape	4
140-00	Process indicator tapes	4
144-00LF	Processor indicator tape lead/latex free	4
204-**	UV treated polypropylene tape	5
537-**	Self fusing silicone tape	5
570-08	Blue PVC fine line masking tape	5
571-Colours	Solid coloured PVC tape	5
571-Striped	Striped coloured PVC tape	5
574-Colours	Solid coloured polyethylene tape	5
583-01	10mil pipe wrap tape	5

Code	Specialty Tapes - Double Coated	
85-00	Double sided cloth tape	6
401-00	High performance double sided tissue tape	6
406-00	Double sided high tensile flatback tape	6
407-00	Double sided crepe paper tape	6
408-00	Double sided polyester tape	6
409-00	Double sided UPVC tape	6
412-00	2mil reverse wound adhesive transfer tape	6
412-30	2mil regular wound adhesive transfer tape	6
413-92	9,2mil scrim reinforced adhesive transfer tape	6
414-00	5mil reverse wound adhesive transfer tape	6
414-30	5Mil Regular Wound Adhesive Transfer Tape	6
420/421/422-10	Double sided close cell polyethylene foam tape	7
425/426	Very high bond acrylic tape	7
431-00	Double-coated polyethylene film	7
448-00	Double-coated polyester film	7
85109	Enclosure (double-sided) tape	7

Code	Strapping & Filament Tapes	
174-10	MOPP utility strapping tape	8
175-01	MOPP general purpose strapping tape	8
176-10	MOPP utility strapping tape	8
179-00	General purpose filament tape	8
180-00	Industrial grade filament tape	8
181-00	High tensile filament tape	8
188-00	High performance filament tape	8
191-00	Bi-directional filament tape	8

Code	Film Tapes	
206-00	Cellulose tape	11
208-00	Clear BOPP office tape	11
222-**	PVC produce bundling tape	11
280-00	Matte polypropylene tape	11

Code	Electrical Tapes	
330-01/330-**	Vinyl 7mil UL-CSA electrical tape	12
388-01	Vinyl 8mil UL-CSA electrical tape	12
389-01	Vinyl 8.5mil UL-CSA electrical tape	12








Code	Box Sealing Tapes - Hand Rolls	
227-00	High performance polyester box sealing tape	13
229-00	Heavy duty BOPP box sealing tape	13
231-00	Premium BOPP box sealing tape	13
233-00	Industrial grade BOPP box sealing tape	13
235-00/237-**	Production grade BOPP box sealing tape	13
241-00/241-**	Cold application BOPP box sealing tape	13 - 14
243-**	General purpose BOPP box sealing tape	14
263-**	Economy grade BOPP box sealing tape	14
257-**	General purpose BOPP box sealing tape	14
6235-**	Stock printed box sealing tape	14

Code	Box Sealing Tapes - System Length Rolls	
228-00	High performance polyester box sealing tape	15
230-00	Heavy duty BOPP box sealing tape	15
232-00	Premium BOPP box sealing tape	15
234-00	Industrial grade BOPP box sealing tape	15
236-00/238-**	Production grade BOPP box sealing tape	15
242-00/242-**	Cold application BOPP box sealing tape	15
244-00	General purpose BOPP box sealing tape	15
264-00	Economy grade BOPP box sealing tape	15
258-00	General purpose BOPP box sealing tape	15

Code	Construction Tape	
85109	Enclosure (double-sided) tape	16
89-21/90-21	Aluminum foil tape	16
89-21CA/90-21CA	Cold application aluminum foil tape	16
168-01	General purpose anti-slip tape	16
201-21	Metallized BOPP splicing and seaming tape	16
202-**	FlexPro® UL-181B-FX listed flexible duct tape	16
205-**	Tuck® Contractors' sheathing tape for house wrap	16
219-08	Tuck® Contractors' sheathing tape for PE vapor barrier	16
250-**	Polyethylene masking tape for stucco application	16
278-10	Polyethylene splicing/masking tape	17
560-**	Adhesive mats	17
560-08	Adhesive mats on a base	17
572-05/573-05	Yellow PVC tape printed NATURAL GAS * PROPANE GAS	17

Code	Dispensers	
805	Cello-desk tape dispenser	18
806	Cello-executive desktop dispenser	18
808	ATG dispenser	18
841	Box sealer (mouse trap) dispenser	18
842	Adjustable tension box sealer dispenser	18
845	Adjustable tension box sealer dispenser	18
860	Produce bag sealer dispenser with bag trimmer	18
889	Strapping tape dispenser	18

# Poly Coated Duct

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %								
 <b>88-21</b> Silver (21)	Production grade poly coated-cloth tape - high shear, high tack. Uses: Good moisture and water resistance. Conforms well and can be torn by hand. Available dimension: Width – 48mm • Lengths – 55m.	NR	20	55	6	24								
 <b>93-21</b> Silver (21)	Economy grade poly coated-cloth tape - balanced construction. Uses: Repair, water resistant packaging, duct work. Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 55m.	NR	21	65	7	25								
 <b>94-21</b> Silver (21)	General purpose poly coated-cloth tape - thicker film and adhesive mass. Uses: Repair, water resistant packaging, duct work. Available dimensions: Widths – 24mm, 36mm, 48mm, 72mm, 96mm • Lengths – 55m.	NR	25	65	8.5	26								
 <b>94-colours</b> 8 Colours	General purpose poly coated-cloth tape - thicker film and adhesive mass. Uses: Colour coding, bookbinding, identification. Available dimension: Width – 48mm • Lengths – 55m.	NR	25	65	8.5	26								
	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Brown (03)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td>White (10)</td> <td>Olive (19)</td> </tr> </table>	Black (01)	Red (02)	Brown (03)	Yellow (05)	Green (07)	Blue (08)	White (10)	Olive (19)					
Black (01)	Red (02)	Brown (03)	Yellow (05)											
Green (07)	Blue (08)	White (10)	Olive (19)											
 <b>96-21</b> Silver (21)	Industrial grade poly coated-cloth tape - meets UL 723 requirements. Uses: HVAC works where UL-723 norm is required. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	NR	27	65	10	28								
 <b>98-**</b> 2 Colours	Contractor grade poly coated-cloth tape - high tack & adhesion. Uses: For abatement projects.	NR	27	70	9	28								
	<table border="1"> <tr> <td>Black (01)</td> <td>Available dimension: Width – 48mm • Lengths – 55m.</td> </tr> <tr> <td>Silver (21)</td> <td>Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.</td> </tr> </table>	Black (01)	Available dimension: Width – 48mm • Lengths – 55m.	Silver (21)	Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.									
Black (01)	Available dimension: Width – 48mm • Lengths – 55m.													
Silver (21)	Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.													
 <b>99-21</b> Silver (21)	Premium grade poly coated-cloth tape - rugged construction. Uses: Sandblasting, patching fiberglass and metal, overseas packaging. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	NR	30	80	11	30								


**Please note:** Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesive: NR - Natural Rubber



Cantech offers a complete range of polycoated duct tapes including general purpose, asbestos removal, industrial grade for sandblasting and premium grade for special projects.

# Masking

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 <b>101-00</b>	Industrial grade masking tape - resists to 130°C (266°F) for 60 minutes. Uses: Shelf ID, splicing, spray/brush, painting & bundling. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	16	30	6	10
 <b>102-00</b>	Utility grade masking tape - resists to 55°C (130°F) for 30 minutes. Uses: Splicing, light bundling & packaging. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 55m.	SR	14	55	4.5	7
 <b>103-00</b>	Economy industrial masking tape - resists to 70°C (158°F) for 30 minutes. Uses: Indoor masking, holding, bundling & tabbing. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	18	27	5	9
 <b>105-00</b>	Temperature performance masking tape - resists to 130°C (266°F) for 60 minutes. Uses: Spray/brush painting, OEM & silk screening. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	25	30	6	8
 <b>107-00</b>	General purpose masking tape - resists to 80°C (176°F) for 60 minutes. Uses: Painting, splicing & light bundling. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm, 36mm, 48mm, 72mm, 96mm • Lengths – 55m.	NR	16	28	5.4	7
 <b>109-07</b>	Premium safe tack masking tape - resists to 80°C (176°F) for 30 minutes. Uses: 10 Day clean removal - resists most paint and lacquers. furniture industry. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	20	18	5	7
 <b>Green (07)</b>						
 <b>118-08</b>	UV resistant 30 day masking tape - resists to 55°C (130°F) for 30 minutes. Uses: Mask glass, metal, plastic, PVC where long term UV protection is required. Available dimensions: Widths – 24mm, 36mm, 48mm • Lengths – 55m.	WA	23	20	5	8
 <b>Blue (08)</b>						
 <b>120-**</b>	Coloured masking tape - resists to 55°C (130°F) for 30 minutes. Uses: Available in 5 colours for colour coding, bag sealing & dry cleaner marking. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 55m.	SR	19	55	5	6
 5 Colours	Black (01)    Red (02)    Yellow (05) Green (07)    Blue (08)					
 <b>122-00</b>	Production grade masking tape - resists to 55°C (130°F) for 30 minutes. Uses: Masking in high speed production, splicing & light packaging. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	SR	19	55	5	7
 <b>127-00</b>	OEM grade masking tape - resists to 100°C (212°F) for 60 minutes. Uses: OEM applications, compatible with water born paints. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	30	24	6.2	9
 <b>129-05</b>	High temperature performance masking tape - resists to 160°C (320°F) for 30 minutes. Uses: OEM applications where high temperature resistance is required. Available dimensions: Widths – 24mm, 36mm, 48mm, 72mm • Lengths – 55 m	NR	23	30	6.5	9
 <b>Yellow (05)</b>						







**Please note:** Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** NR - Natural Rubber    WA - Water Acrylic    SR - Synthetic Rubber (HM)

Our global Cantech® line includes a range of masking tapes for many uses, from general purpose painting grade to high temperature OEM applications.



# Single Coated

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 <b>91-21</b> Silver (21)	Premium aluminum foil tape - linerless. Uses: Aircraft paint stripping, heat dissipation, sound dampening, metal patching. Available dimensions: Widths – 25.4mm, 50.8mm, 76.2mm • Lengths – 55m.	<b>SA</b>	<b>28</b>	<b>55</b>	<b>5</b>	<b>3</b>
 <b>133-04</b> Brown (04)	Extensible flatback Kraft tape - (Ph Neutral) and adhesive does not contain SIS. Uses: Repair of torn jumbo paper rolls, splicing liner boards, holding and general packing. Available dimensions: Widths – 48mm, 96mm • Lengths – 55m.	<b>NR</b>	<b>45</b>	<b>45</b>	<b>6.5</b>	<b>7</b>
 <b>134-04</b> Brown (04)	Extensible flatback Kraft splicing tape - acid free (Ph Neutral). Uses: Core & paper splicing, picture frame backing finish. Available dimensions: Widths – 24mm, 48mm, 72mm, 96mm • Lengths – 55m.	<b>NR</b>	<b>45</b>	<b>45</b>	<b>6.5</b>	<b>7</b>
 <b>139-04</b> Brown (04)	Extensible flatback Kraft box sealing tape - strength, moisture resistant. Uses: Carton sealing, patching, splicing. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	<b>SR</b>	<b>45</b>	<b>70</b>	<b>6</b>	<b>7</b>
 <b>140-00</b>	Class 1 process indicator tape - confirms sterilization cycle when lines turn black. Uses: React positively under correct minimum levels of heat and moisture. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.	<b>NR</b>	<b>20</b>	<b>25</b>	<b>6</b>	<b>7</b>
 <b>144-00</b> <b>LF</b>	Class 1 process indicator tape lead/latex free - confirms sterilization cycle when lines turn black. Uses: React positively under correct minimum levels of heat and moisture. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.	<b>SR</b>	<b>20</b>	<b>30</b>	<b>6</b>	<b>7</b>








**Please note:** Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** NR - Natural Rubber SA - Solvent Acrylic SR - Synthetic Rubber (HM)



**Product QUALITY and INNOVATION, a SHARP FOCUS on CUSTOMER SERVICE, ongoing TECHNOLOGY investments and a TRAINED and MOTIVATED WORKFORCE are the KEYS to Cantech's decades of continued SUCCESS.**

# Single Coated

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %								
 <b>204-**</b> 2 Colours	UV treated polypropylene tape - resists UV and weathering. Uses: Splicing of paper & film. Splicing and repairing of greenhouse film. Available dimensions: Widths – 48mm, 72mm • Lengths – 66m.	SA	30	40	3	140								
	<table border="1"> <tr> <td>Clear (00)</td> <td>White (10)</td> </tr> </table>						Clear (00)	White (10)						
Clear (00)	White (10)													
 <b>537-**</b> 5 Colours	Self Fusing Silicone Tape - assures airtight, leak and water resistant seal. Uses: Pipe wrap for corrosion and dirt protection, colour coding wrap. Available dimensions: Widths – 1", 2" • Lengths – 12 yards.	—	80 PSI	—	20 & 30	300								
	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Yellow (05)</td> </tr> <tr> <td>Blue (08)</td> <td>Grey (21)</td> <td></td> </tr> </table>						Black (01)	Red (02)	Yellow (05)	Blue (08)	Grey (21)			
	Black (01)						Red (02)	Yellow (05)						
Blue (08)	Grey (21)													
 <b>570-08</b> Blue (08)	Blue PVC fine line masking tape - resists 80°C (176°F) for 30 minutes. Uses: Stripping and colour separation. Available dimensions: Widths – 3mm, 6mm, 9mm, 12mm • Lengths – 33m.	NR	14	22	5	150								
 <b>571-**</b> Colours 7 Colours	Solid coloured PVC tape - available in 7 colours. Uses: Lane marking, physical hazard/caution. Available dimensions: Widths – 25mm, 50mm, 75mm • Lengths – 33m.	NR	18	30	6	160								
	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Yellow (05)</td> <td>Green (07)</td> </tr> <tr> <td>Blue (08)</td> <td>White (10)</td> <td>Dark Blue (14)</td> <td></td> </tr> </table>						Black (01)	Red (02)	Yellow (05)	Green (07)	Blue (08)	White (10)	Dark Blue (14)	
	Black (01)						Red (02)	Yellow (05)	Green (07)					
Blue (08)	White (10)	Dark Blue (14)												
 <b>571-51</b>	Striped coloured PVC tape - available in yellow/black. Uses: Lane marking, physical hazard/caution. Available dimensions: Widths – 50mm, 75mm • Lengths – 33m.	NR	16	21	6	200								
 <b>574-**</b> Colours 4 Colours	Solid coloured polyethylene tape - available in 4 colours. Uses: Lane marking, physical hazard/caution, colour coding, pipe wrap Available dimension: Width – 48mm • Lengths – 33m.	NR	20	40	7	85								
	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Yellow (05)</td> <td>White (10)</td> </tr> </table>						Black (01)	Red (02)	Yellow (05)	White (10)				
Black (01)	Red (02)	Yellow (05)	White (10)											
 <b>583-01</b> Black (01)	10Mil pipe wrap tape - meets the UPC® as per IAPMO standards PS-37-90. Uses: For protection of underground and above ground pipelines. Available dimensions: Widths – 24mm, 48mm, 96mm • Lengths – 30m.	BR	26	80	10	130								

**Please note:** Values are averages only and may vary within industry tolerances.

The final user must assure product suitability for the application and assumes all risks and liabilities.  
 Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** NR - Natural Rubber SA - Solvent Acrylic BR - Butyl Rubber

**QUALITY TAPES FOR SO MANY APPLICATIONS**

# Double Coated

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 <b>85-00</b>	Double sided cloth tape - provides strength and high tack. Uses: Uneven surfaces, holding carpet, linoleum & underlay. Available dimension: Width – 48mm • Lengths – 33m.	<b>NR</b>	<b>35</b>	<b>37</b>	<b>11</b>	<b>7</b>
 <b>401-00</b>	High performance double sided tissue tape - resists -22°C (-10°F) to 120°C (250°F). Uses: Corrugated paper, heavy paper & film splicing. Available dimensions: Widths – 24mm, 36mm, 48mm, 72mm • Lengths – 50m.	<b>SA</b>	<b>8</b>	<b>54</b>	<b>3.5</b>	<b>4</b>
 <b>406-00</b>	Double sided high tensile flatback tape - very high tensile. Uses: High stress splicing, silk screen industry & golf grip. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 33m.	<b>NR</b>	<b>35</b>	<b>55</b>	<b>6.6</b>	<b>3</b>
 <b>407-00</b>	Double sided crepe paper tape - good wet grab. Uses: Holding plates in printing industry, splicing & mounting. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 33m.	<b>NR</b>	<b>23</b>	<b>45</b>	<b>5</b>	<b>8</b>
 <b>408-00</b>	Double sided polyester tape - resists to 200°C (390°F) for 30 seconds. Uses: Splicing, bonding, laminating & mounting. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm • Lengths – 33m.	<b>SA</b>	<b>10</b>	<b>80</b>	<b>3</b>	<b>50</b>
 <b>409-00</b>	Double sided UPVC tape - excellent aging and UV resistance, acrylic adhesive. Uses: Holding name plates, vinyl extrusions, bonding plastics, metal & wood. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 50m.	<b>SA</b>	<b>10</b>	<b>100</b>	<b>10</b>	<b>5</b>
 <b>412-00</b> 1" core	Reverse wound adhesive transfer tape - Is PH Neutral and UV resistant. Uses: Picture framing industry, mounting & paper splicing. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m.	<b>SA</b>	<b>—</b>	<b>40</b>	<b>2</b>	<b>—</b>
 <b>412-30</b> 3" core	General purpose adhesive transfer tape - high tack/shear. Uses: Mounting, paper splicing. Is pH Neutral and UV resistant. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	<b>SA</b>	<b>—</b>	<b>40</b>	<b>2</b>	<b>—</b>
 <b>413-92</b> 3" core	Scrim reinforced adhesive transfer tape - high tack/shear. Uses: Splicing, laminating, carpet cove installation, permanent bonding. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm, 89mm, 152mm • Lengths – 50m.	<b>WA</b>	<b>—</b>	<b>120</b>	<b>9.2</b>	<b>—</b>
 <b>414-00</b> 1" core	Reverse wound adhesive transfer tape - heavier adhesive mass. Uses: Splicing, gap filling, mounting & laminating. Is PH Neutral and UV resistant. Available dimensions: Widths – 12mm, 18mm • Lengths – 16.5m.	<b>SA</b>	<b>—</b>	<b>80</b>	<b>5</b>	<b>—</b>
 <b>414-30</b> 3" core	Regular wound adhesive transfer tape - heavier adhesive mass. Uses: Splicing, gap filling, mounting & laminating. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 33m.	<b>SA</b>	<b>—</b>	<b>80</b>	<b>5</b>	<b>—</b>

**Please note:** Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** NR - Natural Rubber SA - Solvent Acrylic WA - Water Acrylic

# Double Coated



Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
<b>420-10</b> 1/8" Thick	Double sided close cell polyethylene foam tape - shear performance. Uses: Gasketing, sealing, mounting & joining. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 16.5m.	SA	—	125	125	—
<b>421-10</b> 1/16" Thick	Double sided close cell polyethylene foam tape - shear performance. Uses: Gasketing, sealing, mounting & joining. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 33m.	SA	—	125	62.5	—
<b>422-10</b> 1/32" Thick	Double sided close cell polyethylene foam tape - Shear Performance. Uses: Gasketing, sealing, mounting & joining. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 66m.	SA	—	125	31	—
<b>425-25</b> White (10)	Very high bond acrylic tape - permanent bond. replaces mechanical fasteners. Uses: Auto trim attachment, furniture, appliance & signs assembly. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 66m.	SA	200	90	25	500
<b>425-45</b> White (10)	Very high bond acrylic tape - permanent bond. replaces mechanical fasteners. Uses: Auto trim attachment, furniture, appliance & signs assembly. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 33m.	SA	200	90	45	500
<b>426-10</b> Clear (00)	Very high bond acrylic tape - permanent bond. replaces mechanical fasteners. Uses: Lamination and bonding of clear substrates, furniture & appliance assembly. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 55m.	SA	150	60	10	1000
<b>431-00</b>	Double-coated polyethylene film - aggressive synthetic rubber-based adhesive. Uses: Splicing, holding, joining & mounting applications. carpet installation. Available dimensions: Widths – 48mm • Lengths – 5m, 10m, 33m, 66m.	SR	4	50	3	100
<b>448-00</b>	Double-coated polyester film tape - high tack ultra clear adhesive. Uses: Difficult splicing, holding, joining, attaching, mounting and laminating applications. Available dimension: Width – 48mm • Lengths – 33m.	CA	10	120	4.5	50
<b>85109</b>	Enclosure (double-sided) tape - medium tack adhesive for all type of surfaces. Uses: To hold temporary polyethylene doors, and polyethylene on delicate surfaces. Available dimension: Width – 48mm • Lengths – 18.28m.	NR	35	39/18	14	7

**Please note:** Values are averages only and may vary within industry tolerances.









The final user must assure product suitability for the application and assumes all risks and liabilities.  
Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** NR - Natural Rubbe SA - Solvent Acrylic SR - Synthetic Rubber (HM) CA - Clear Acrylic





# Strapping & Filament

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil
 <b>174-10</b> MOPP utility strapping tape - good strength. Uses: Palletizing of boxes, holding & securing items in transit. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm • Lengths – 55m.	White (10)	<b>WA</b>	<b>90</b>	<b>32</b>	<b>3</b> <b>35</b>
 <b>175-01</b> MOPP general purpose strapping tape - UV resistant & good impact strength. Uses: UV & weathering resistance makes it ideal for outdoor applications. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm • Lengths – 55m.	Black (01)	<b>WA</b>	<b>150</b>	<b>32</b>	<b>4.5</b> <b>40</b>
 <b>176-10</b> MOPP utility strapping tape - good strength. Uses: Palletizing of boxes, holding & securing items in transit. Available dimensions: Widths – 12mm, 18mm • Lengths – 110m.	White (10)	<b>SR</b>	<b>100</b>	<b>60</b>	<b>3</b> <b>35</b>
 <b>179-00</b> General purpose filament tape - high tack & shear. Uses: Palletizing, strapping, bundling & reinforcing. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.		<b>SR</b>	<b>110</b>	<b>90</b>	<b>4.5</b> <b>6</b>
 <b>180-00</b> Industrial grade filament tape - high tack & shear. Uses: Palletizing, strapping, bundling & reinforcing. Available dimensions: Widths – 12mm, 18mm, 24mm, 48mm • Lengths – 55m.		<b>SR</b>	<b>160</b>	<b>95</b>	<b>5</b> <b>6</b>
 <b>181-00</b> High tensile filament tape - high tack & shear. Uses: Palletizing, strapping, bundling & reinforcing. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.		<b>SR</b>	<b>200</b>	<b>95</b>	<b>5.5</b> <b>6</b>
 <b>188-00</b> High performance filament tape - high tensile resistance. Uses: Palletizing, strapping, bundling & sealing. Available dimensions: Widths – 12mm, 18mm, 24mm, 48mm • Lengths – 55m.		<b>SR</b>	<b>300</b>	<b>100</b>	<b>6</b> <b>6</b>
 <b>191-00</b> Bi-directional filament tape - provides good tensile in both directions. Uses: Palletizing, strapping, bundling, reinforcing & securing heavy cartons. Available dimensions: Widths – 24mm, 48mm • Lengths – 55m.		<b>SR</b>	<b>150</b> <b>/50</b>	<b>100</b>	<b>5.7</b> <b>5</b>

**Please note:** Values are averages only and may vary within industry tolerances.  
 The final user must assure product suitability for the application and assumes all risks and liabilities.  
 Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** **WA** - Water Acrylic   **SR** - Synthetic Rubber (HM)

**QUALITY TAPES FOR SO MANY APPLICATIONS**

Canadian Technical Tape formulates and manufactures pressure sensitive tapes for the ever changing product needs of our customers. The company is privately held, employs over 250 people and has approximately 300,000 square feet of modern manufacturing and warehousing throughout North America.









Since 1950 we have maintained steady growth as we've moved into new markets with re-formulated products. Our customer base includes distributors worldwide in many markets including – Industrial, Hardware, Medical, Mill Supply, Packaging, Paper, and Construction. Our assortment of over 100 industrial products makes Cantech the choice for most pressure sensitive tape requirements.

**cantech**<sup>®</sup>

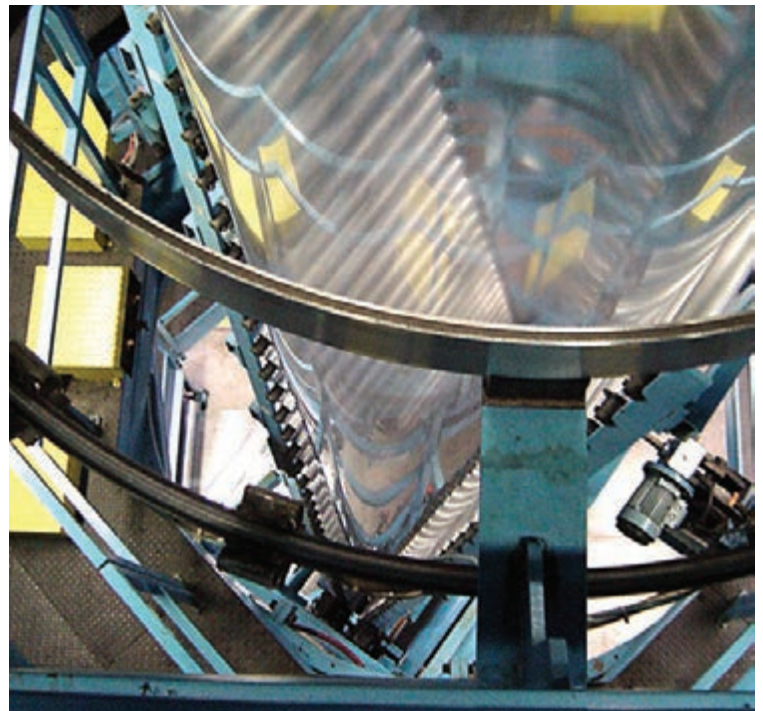
# Film

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %						
 <b>206-00</b> 1" core	Cellulose tape - static free. Uses: Sealing, holding, packaging & tabbing. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 66 m.	NR	25	40	2	20						
 <b>208-00</b> 1" core	Clear BOPP office tape - does not discolour, remains clear. Uses: Sealing, holding, packaging & tabbing. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m, 66m.	WA	16	20	1.8	150						
 <b>222-**</b> 5 Colours 3" core	PVC produce bundling tape - excellent for colour coding. Uses: Bag sealing, identification tape. Available dimensions: Widths – 9mm, 12mm • Lengths – 66m.	NR	28	17	2.1	150						
	<table border="1"> <tr> <td>Red (02)</td> <td>Yellow (05)</td> <td>White (10)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td></td> </tr> </table>	Red (02)	Yellow (05)	White (10)	Green (07)	Blue (08)						
Red (02)	Yellow (05)	White (10)										
Green (07)	Blue (08)											
 <b>280-00</b> 1" core	Matte polypropylene tape - can be written on & invisible once applied. Uses: Sealing, holding, packaging & tabbing. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m.	WA	25	10	2	50						





**Please note:** Values are averages only and may vary within industry tolerances.  
 The final user must assure product suitability for the application and assumes all risks and liabilities.  
 Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** NR - Natural Rubber WA - Water Acrylic

We deliver  
**PERSONAL SERVICE,**  
**SUPERIOR QUALITY** and  
 a **GREAT PRODUCT MIX.**



# Electrical








Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %						
All electrical tapes are in 18mmx20m only												
 <b>330-01</b>	Vinyl 7mil UL-CSA electrical tape - very conformable & water resistant. Uses: Electric wire insulation, solvent & corrosion protection. Rated for: -7°C to 80°C (19°F to 175°F) . 600 volts. Available dimension: Width – 18mm • Lengths – 20m.	NR	20	18	7	225						
Black (01)												
 <b>330-02</b>	Vinyl 7mil UL-CSA electrical tape - very conformable & water resistant. Uses: Electric wire insulation, solvent & corrosion protection. Rated for: -7°C to 80°C (19°F to 175°F) . 600 volts. Available dimension: Width – 18mm • Lengths – 20m.	NR	20	18	7	225						
5 Colours	<table border="1"> <tr> <td>Red (02)</td> <td>Yellow (05)</td> <td>White (10)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td></td> </tr> </table>	Red (02)	Yellow (05)	White (10)	Green (07)	Blue (08)						
Red (02)	Yellow (05)	White (10)										
Green (07)	Blue (08)											
 <b>388-01</b>	Vinyl 8.5mil UL-CSA electrical tape - softer film & adhesive for cold application. Uses: Electric wire insulation, solvent & corrosion protection. Rated for: -18°C to 90°C (-4°F to 194°F) . 600 volts. Available dimension: Width – 18mm • Lengths – 20m.	NR	22	18	8.5	200						
Black (01)												
 <b>389-01</b>	Vinyl 8mil UL-CSA electrical tape - indoor/outdoor application. Uses: Electric wire insulation, solvent & corrosion protection. Rated for: -18°C to 90°C (-4°F to 194°F) . 600 volts. Available dimension: Width – 18mm • Lengths – 20m.	NR	22	18	8	200						
Black (01)												

**Please note:** Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber



# Box Sealing






Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %								
 <b>227-00</b> High performance polyester box sealing tape - high strength, wet grab. Uses: Box sealing where moisture and high impact resistance is required. Meets ASTM-D5486 Type Class 2. Available dimension: Width – 48mm • Lengths – 55m. Clear (00)		SR	60	90	3	100								
 <b>229-00</b> Heavy duty BOPP box sealing tape - strength, wet grab. Uses: Box sealing where moisture and high impact resistance is required. Available dimension: Width – 48mm • Lengths – 100m. Clear (00)		SR	46	80	3	140								
 <b>231-00</b> Premium BOPP box sealing tape - strength, wet grab. Uses: Box sealing where moisture and high impact resistance is required. Available dimensions: Widths – 48mm, 72mm • Lengths – 100m. Clear (00)		SR	35	75	2.5	140								
 <b>233-00</b> Industrial grade BOPP box sealing tape - strength, high tack. Uses: Box sealing where moisture and high impact resistance is required. Available dimension: Width – 48mm • Lengths – 100m. Clear (00)		SR	35	70	2.2	140								
 <b>235-00</b> Production grade BOPP box sealing tape - strength, high tack. Uses: Box sealing where moisture and high impact resistance is required. Available dimensions: Widths – 24mm, 48mm • Lengths – 66m. Clear (00)		SR	30	65	2	90								
 <b>237-**</b> Production grade BOPP box sealing tape - strength, high tack. Uses: Box sealing where moisture and high impact resistance is required. Available dimension: Width – 48mm • Lengths – 100m. 8 Colours	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Tan (04)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td>White (10)</td> <td>Orange (11)</td> </tr> </table>	Black (01)	Red (02)	Tan (04)	Yellow (05)	Green (07)	Blue (08)	White (10)	Orange (11)	SR	30	65	2	90
Black (01)	Red (02)	Tan (04)	Yellow (05)											
Green (07)	Blue (08)	White (10)	Orange (11)											
 <b>241-00</b> Cold application BOPP box sealing tape - application temperature > (5°C • 41°F). Uses: Box sealing in food processing plant. Available dimension: Width – 48mm • Lengths – 100m. Clear (00)		SR	30	45	2	90								

**Please note:** Values are averages only and may vary within industry tolerances.  
 The final user must assure product suitability for the application and assumes all risks and liabilities.  
 Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** SR - Synthetic Rubber (HM)



# Box Sealing

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %								
 <b>241-**</b> Cold application BOPP box sealing tape - application temperature > (5°C • 41°F). Uses: Box sealing in food processing plant. Available dimension: Width – 48mm • Lengths – 100m. 8 Colours (Minimum Applies)	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Tan (04)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td>White (10)</td> <td>Orange (11)</td> </tr> </table>	Black (01)	Red (02)	Tan (04)	Yellow (05)	Green (07)	Blue (08)	White (10)	Orange (11)	<b>SR</b>	<b>30</b>	<b>45</b>	<b>2</b>	<b>90</b>
	Black (01)	Red (02)	Tan (04)	Yellow (05)										
Green (07)	Blue (08)	White (10)	Orange (11)											
 <b>243-**</b> General purpose BOPP box sealing tape - good strength & adhesion. Uses: Box sealing, holding, bundling & label protection. 2 Colours	<table border="1"> <tr> <td>Clear (00)</td> <td>Available dimensions: Width – 48mm • Lengths – 66m, 100m, 132m.</td> </tr> <tr> <td>Tan (04)</td> <td>Available dimensions: Width – 48mm • Lengths – 66m, 132m.</td> </tr> </table>	Clear (00)	Available dimensions: Width – 48mm • Lengths – 66m, 100m, 132m.	Tan (04)	Available dimensions: Width – 48mm • Lengths – 66m, 132m.	<b>SR</b>	<b>27</b>	<b>55</b>	<b>1.7</b>	<b>80</b>				
	Clear (00)	Available dimensions: Width – 48mm • Lengths – 66m, 100m, 132m.												
Tan (04)	Available dimensions: Width – 48mm • Lengths – 66m, 132m.													
 <b>263-**</b> Economy grade BOPP box sealing tape - good strength & adhesion. Uses: Box sealing, holding, bundling & label protection. 2 Colours	<table border="1"> <tr> <td>Clear (00)</td> <td>Available dimensions: Width – 48mm • Lengths – 100m. Widths – 48mm, 72mm, 96mm • Lengths – 66m. Widths – 48mm, 72mm • Lengths – 132m.</td> </tr> <tr> <td>Tan (04)</td> <td>Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 66m. Width – 48mm • Lengths – 100m. Width – 48mm • Lengths – 132m.</td> </tr> </table>	Clear (00)	Available dimensions: Width – 48mm • Lengths – 100m. Widths – 48mm, 72mm, 96mm • Lengths – 66m. Widths – 48mm, 72mm • Lengths – 132m.	Tan (04)	Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 66m. Width – 48mm • Lengths – 100m. Width – 48mm • Lengths – 132m.	<b>SR</b>	<b>24</b>	<b>50</b>	<b>1.6</b>	<b>70</b>				
	Clear (00)	Available dimensions: Width – 48mm • Lengths – 100m. Widths – 48mm, 72mm, 96mm • Lengths – 66m. Widths – 48mm, 72mm • Lengths – 132m.												
Tan (04)	Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 66m. Width – 48mm • Lengths – 100m. Width – 48mm • Lengths – 132m.													
 <b>257-**</b> Aqueous based acrylic adhesive BOPP box sealing tape - good strength & UV resistance. Uses: Box sealing, holding, bundling & label protection, tape won't discolour. Available dimension: Width – 48mm • Lengths – 100m. 2 Colours	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)	<b>WA</b>	<b>20</b>	<b>20</b>	<b>1.8</b>	<b>160</b>						
	Clear (00)	Tan (04)												
 <b>6235-**</b> Stock printed box sealing tape - ease of identification, discourages pilferage. Uses: Box, parcel and envelope closure, holding and bundling. Available dimension: Width – 48mm • Lengths – 100m. 6235-1011 (Fragile), 1012 (Packing slip enclosed) 1016 (Tamper proof)		<b>SR</b>	<b>25</b>	<b>42</b>	<b>1.8</b>	<b>130</b>								












**Please note:** Values are averages only and may vary within industry tolerances.  
 The final user must assure product suitability for the application and assumes all risks and liabilities.  
 Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** WA - Water Acrylic SR - Synthetic Rubber (HM)



We offer a wide selection of box sealing tapes to meet your specific application requirements. Heavy duty, general purpose, Cold Temperature and Production grades are all manufactured with the most advanced technology providing quality and consistency.

# Box Sealing












Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %								
 <b>228-00</b>	High performance polyester box sealing tape - high strength, wet grab. Uses: Box sealing where moisture and high impact resistance is required. Meets ASTM-D5486 Type Class 2. Available dimension: Width – 48mm • Lengths – 914m.	SR	60	90	3	100								
Clear (00)														
 <b>230-00</b>	Heavy duty BOPP box sealing tape - strength, wet grab. Uses: Box sealing where moisture and high impact resistance is required. Available dimension: Width – 48mm • Lengths – 914m.	SR	46	80	3	140								
Clear (00)														
 <b>232-00</b>	Premium BOPP box sealing tape - strength, wet grab. Uses: Box sealing where moisture and high impact resistance is required. Available dimension: Width – 48mm • Lengths – 914m.	SR	35	75	2.5	140								
Clear (00)														
 <b>234-00</b>	Industrial grade BOPP box sealing tape - strength, high tack. Uses: Box sealing where moisture and impact resistance is required. Available dimension: Width – 48mm • Lengths – 914m.	SR	35	70	2.2	140								
Clear (00)														
 <b>236-00</b>	Production grade BOPP box sealing tape - strength, high tack. Uses: Box sealing where moisture and impact resistance is required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, Width – 48mm • Lengths – 1828m.	SR	30	65	2	90								
Clear (00)														
 <b>238-**</b>	Production grade BOPP box sealing tape - strength, high tack. Uses: Box sealing where moisture and impact resistance is required. Available dimension: Width – 48mm • Lengths – 914m.	SR	30	65	2	90								
8 Colours	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Tan (04)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td>White (10)</td> <td>Orange (11)</td> </tr> </table>	Black (01)	Red (02)	Tan (04)	Yellow (05)	Green (07)	Blue (08)	White (10)	Orange (11)					
Black (01)	Red (02)	Tan (04)	Yellow (05)											
Green (07)	Blue (08)	White (10)	Orange (11)											
 <b>242-00</b>	Cold application BOPP box sealing tape - application temperature > (5°C • 41°F). Uses: Box sealing in food processing plant. Available dimensions: Width – 48mm • Lengths – 914m, 1828m.	SR	30	45	2	90								
Clear (00)														
 <b>242-**</b>	Cold application BOPP box sealing tape - application temperature > (5°C • 41°F). Uses: Box sealing in food processing plant. Available dimensions: Width – 48mm • Lengths – 914m, 1828m.	SR	30	45	2	90								
8 Colours (Minimum Applies)	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Tan (04)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td>White (10)</td> <td>Orange (11)</td> </tr> </table>	Black (01)	Red (02)	Tan (04)	Yellow (05)	Green (07)	Blue (08)	White (10)	Orange (11)					
Black (01)	Red (02)	Tan (04)	Yellow (05)											
Green (07)	Blue (08)	White (10)	Orange (11)											
 <b>244-00</b>	General purpose BOPP box sealing tape - good strength & adhesion. Uses: Box sealing, holding, bundling & label protection. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m. Available dimension: Width – 48mm • Lengths – 1828m.	SR	27	55	1.7	80								
Clear (00)														
 <b>264-00</b>	Economy grade BOPP box sealing tape - good strength & adhesion. Uses: Box sealing, holding, bundling & label protection. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m. Available dimension: Width – 48mm • Lengths – 1828m.	SR	24	50	1.6	70								
Clear (00)														
 <b>258-00</b>	Aqueous based acrylic adhesive BOPP box sealing tape - good strength & UV resistance. Uses: Box sealing, holding, bundling & label protection, tape won't discolour. Available dimensions: Width – 48mm • Lengths – 914m, 1371m.	WA	20	20	1.8	160								
Clear (00)														

**Please note:** Values are averages only and may vary within industry tolerances.  
The final user must assure product suitability for the application and assumes all risks and liabilities.  
Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** WA - Water Acrylic SR - Synthetic Rubber (HM)







# Construction

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 <b>85109</b>	Enclosure (double-sided) tape - medium tack adhesive for all type of surfaces. Uses: To hold temporary polyethylene doors and polyethylene on delicate surfaces. Available dimension: Width – 48mm • Lengths – 18.28m.	NR	35	39/18	14	7
 <b>89-21</b> Silver (21)	Aluminum foil tape - 40 Micron- resists to -40°C to 120°C (-40°F to 248°F). UL723 listed. Uses: Joining /sealing duct work, insulation, seaming, sealing & patching. Available dimensions: Widths – 48mm, 72mm • Lengths – 45m, 90m.	SA	16	75	2.9	2
 <b>89-21</b> CA Silver (21)	Aluminum foil tape - 40 Micron - resists to -40°C to 120°C (-40°F to 248°F). UL723 listed. Designed for cold application and can be applied from -5°C to 40°C. Uses: Joining /sealing duct work, insulation, seaming, sealing & patching. Available dimensions: Widths – 48mm, 72mm • Lengths – 45m, 90m.	SA	16	60	2.9	2
 <b>90-21</b> Silver (21)	Aluminum foil tape - 50 Micron - resists to -40°C to 120°C (-40°F to 248°F). UL723 Listed. Uses: Joining /sealing duct work, insulation, seaming, sealing & patching. Available dimensions: Widths – 48mm, 72mm • Lengths – 45m, 90m.	SA	20	75	3.5	3
 <b>90-21</b> CA Silver (21)	Aluminum foil tape - 50 Micron - resists to -40°C to 120°C (-40°F to 248°F). UL723 Listed. Designed for cold application and can be applied from -5°C to 40°C. Uses: Joining /sealing duct work, insulation, seaming, sealing & patching. Available dimensions: Widths – 48mm, 72mm • Lengths – 45m, 90m.	SA	20	60	3.5	3
 <b>168-01</b> Black (01)	General purpose anti-slip tape - durable & easy to apply, indoor use. Uses: Walkways, ramps, stairways & work areas. Available dimensions: Widths – 25mm, 50mm, 75mm, 150mm • Lengths – 18.28m.	NR	—	50	27	—
 <b>201-21</b> Silver (21)	Metalized BOPP splicing and seaming tape - high shear. Uses: Seaming overlap splice of radiant reflective insulation material. Splicing foil, film & paper. Available dimensions: Widths – 48mm, 72mm • Lengths – 110m.	SA	30	45	3	140
 <b>202-**</b> 2 Colours	FlexPro® UL-181B-FX listed flexible duct tape - alternative to aluminum tape. Uses: Sealing of flexible air ducts and connectors. Seal pipe foam insulation. Dimensions: Widths – 48mm, 72mm • Lengths – 110m. Dimension: Width – 48mm • Lengths – 55m. (202-31).	SA	30	40	3	140
 <b>205-**</b> 2 Colours	Tuck® Contractors' sheathing tape- CCMC evaluation report 11955-R. Uses: Overlap splicing of insulation materials. Available dimension: Width – 60mm • Lengths – 66m.	SA	30	40	3	120
 <b>219-08</b> Blue (08)	Tuck® Contractors' sheathing tape - CCMC evaluation report 14018-R. Uses: Overlap splicing of PE vapor barrier. Available dimensions: Widths – 60mm • Lengths – 55m.	SA	30	60	4.1	120
 <b>250-**</b> 2 Colours	Polyethylene masking tape for stucco application - resists UV for 30 days. Uses: Masking surfaces on outdoor stucco applications. This tape is also available (249-**) featuring serrated edges for ease of tearing. Available dimension: Width – 48mm • Lengths – 55m.	NR	23	50	7	120

**Please note:** Values are averages only and may vary within industry tolerances.  
The final user must assure product suitability for the application and assumes all risks and liabilities.  
Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber SA - Solvent Acrylic

# Construction









Product #	Product Description	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 <b>278-10</b> White (10)	Polyethylene splicing/masking tape - resists UV. Uses: Splicing of polyethylene, hipp wrap & holding poly sheeting. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	<b>NR</b>	<b>25</b>	<b>65</b>	<b>9</b> <b>120</b>
 <b>560-**</b> 2 Colours	Adhesive mats - tacky walk-on mats. Uses: Cleans dust and dirt from shoe soles. Available dimensions: 24" x 36" - 26" x 45" - 31" x 51" (30 mats/set, 4 sets/case). White (10) Available dimension: 24" x 36" (30 mats/set, 4 sets/case).	<b>WA</b>	<b>22</b>	<b>18</b>	<b>2</b> <b>—</b>
 <b>560-08 Base</b>	Adhesive mats on anti-slip base - tacky walk-on mats. Uses: Cleans dust and dirt from shoe soles. Available dimension: 24" x 36" (one set of 30 mats per base).	<b>WA</b>	<b>22</b>	<b>18</b>	<b>2</b> <b>—</b>
 <b>572-05</b> <b>573-05</b>	Yellow PVC tape printed NATURAL GAS Yellow PVC tape printed PROPANE GAS Uses: Identifying labeling product to flag and better identify NATURAL GAS or PROPANE GAS pipe line in the HVAC industry. Available dimension: Widths – 48mm • Lengths – 33m.	<b>WA</b>	<b>30</b>	<b>21</b>	<b>3</b> <b>60</b>

**Please note:** Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions - Custom dimensions other than those listed may be available based upon minimum order requirements.

**Adhesives:** NR - Natural Rubber   WA - Water Acrylic



# Dispensers

	Product Description	Core Diameter	Max. Width	Max. Length
	<b>805</b> Cello-desk tape dispenser	<b>1" - 3"</b>	<b>24mm</b>	<b>66m</b>
	<b>806</b> Cello-executive desktop dispenser	<b>1"</b>	<b>18mm</b>	<b>33m</b>
	<b>808</b> ATG dispenser	<b>1"</b>	<b>18mm</b>	<b>33m</b>
	<b>841</b> Box sealer (mouse trap) dispenser	<b>1" - 3"</b>	<b>48mm</b>	<b>132m</b>
	<b>842</b> Adjustable tension box sealer dispenser	<b>3"</b>	<b>72mm</b>	<b>132m</b>
	<b>845</b> Adjustable tension box sealer dispenser	<b>3"</b>	<b>48mm</b>	<b>132m</b>
	<b>860</b> Produce bag sealer dispenser with bag trimmer	<b>3"</b>	<b>12mm</b>	<b>55m</b>
	<b>889</b> Strapping tape dispenser	<b>3"</b>	<b>24mm</b>	<b>55m</b>

**QUALITY TAPES FOR SO MANY APPLICATIONS**



## **Industrial Catalogue**

[cantech.com](http://cantech.com)



**455 Côte-Vertu Road  
St-Laurent, Quebec, Canada H4N 1E8  
Tel. 514.334.1510 Fax 514.331.1183**



**2222 Eddie Williams Road  
Johnson City, TN. USA 37601-2871**



**1400 Rosemount Avenue  
Cornwall, Ontario, Canada K6J 3E6**